



LIGHTING COLLECTION

Metalmek





METALMEK



AZ61 IP65 6120

INDUSTRIALI / INDUSTRIAL FITTINGS

INSTALLAZIONE

Sospensione, plafone

APPLICAZIONI

Area di stoccaggio, area produttiva, corridoio pubblico
impianti di produzione

CORPO

In polycarbonato antiurto, autoestinguente V2,
stampato ad iniezione.
Ganci di chiusura schermo diffusore in acciaio inox.

ACCESSORI KIT-STAFAZ

STAFFE per fissaggio a parete.

4436-236C

GABBIA in tondino d'acciaio.

4417SP1-2

KIT PER SOSPENSIONE costituito da un dispositivo di
regolazione micrometrica, x2 cavi d'acciaio \varnothing 1.2 mm
L 2000 mm e un rosone in ottone cromato.

SU RICHIESTA

- Alimentatore elettronico dimmerabile PUSH.
- Alimentatore elettronico dimmerabile 1-10V.
- Alimentatore elettronico dimmerabile DALI.

MOUNTINGS

Suspended fitting, surface mounted fitting

APPLICATION

Storage area, production area, public corridor,
manufacturing centre

BODY

Made of shockproof, V2 self-extinguishing,
injection-moulded polycarbonate.
Stainless steel diffuser screen closing hooks.

ACCESSORIES KIT-STAFAZ

Wall BRACKETS.

4436-236C

CAGE in steel rods.

4417SP1-2

SUSPENSION KIT consisting of micrometric regulation
device, x2 steel cable \varnothing 1.2 mm L 2000 mm and chromed
brass cover.


ON REQUEST

- Dimmable electronic ballast PUSH.
- Dimmable electronic ballast 1-10V.
- DALI Dimmable electronic ballast .




AZ61 IP65

6120

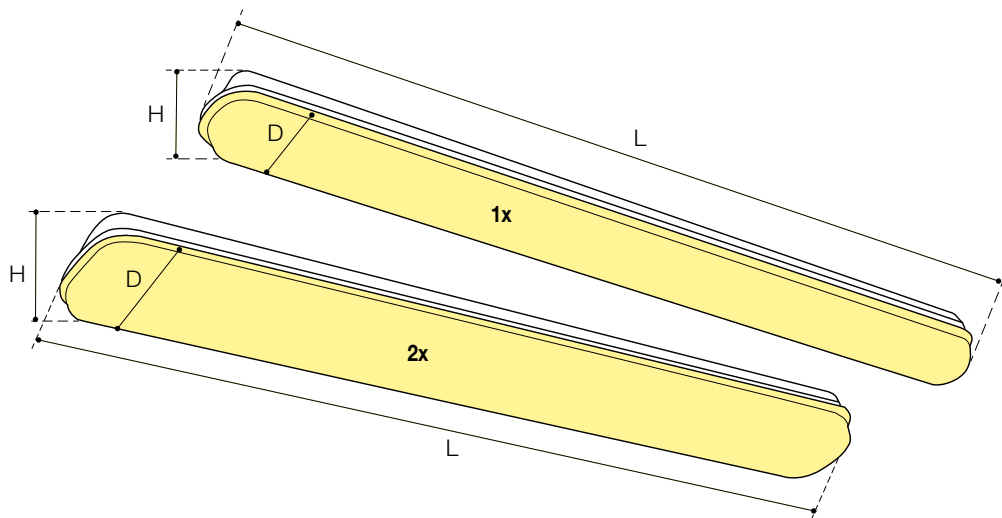

4000K | 10388 lm | 63.9W

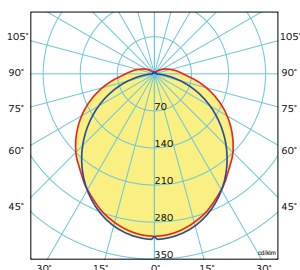

EMISSIONE LUMINOSA

Diretta - Simmetrica

DISPOSITIVO OTTICO

Diffusore in policarbonato autoestinguente V2, stabilizzato agli UV, stampato ad iniezione.

LIGHT EMISSION

Direct - Symmetric

OPTICAL DEVICE

Diffuser in V2 self-extinguishing, UV stabilized, injection-moulded polycarbonate.



K	mA	Line	lm IN	W	D	L	H	EL. COD	DALI COD	EL. + EME COD
4000	350	2	2660	17	136	660		6120NW25W-2	6120NW25WDD-2	6120NW25W-2M
4000	350	1	2660	17	86	1270		6120NW25W-1	6120NW25WDD-1	6120NW25W-1M
4000	700	2	5320	38	136	1270	90	6120NW52W-2	6120NW52WDD-2	6120NW52W-2M
4000	500	1	3780	27	86	1570		6120NW30W-1	6120NW30WDD-1	6120NW30W-1M
4000	1050	2	7980	57	136	1570		6120NW65W-2	6120NW65WDD-2	6120NW65W-2M



FOLLOW US



Metalmek

Metalmek Illuminazione S.r.l.
I - 20045 Lainate (MI)
Via Ramazzotti, 10
Tel. +39 02 9373157
Fax +39 02 9371016
www.metalmek.info
info@metalmek.eu

Metalmek Lighting BV
Canadabaan 7d
NL - 5388 RT Nistelrode
Tel. +31 412 614033
Fax +31 412 613461
www.metalmek.nl
info@metalmek.nl