



LIGHTING COLLECTION

Metalmek





METALMEK



DISCO 8370

INDUSTRIALI / INDUSTRIAL FITTINGS

INSTALLAZIONE

Sospensione

APPLICAZIONI

Area di stoccaggio, area produttiva, impianti di produzione, altezze elevate

CORPO

In alluminio pressofuso verniciato nero.

ACCESSORI

186311

MOVEMENTSENSOR HB 65 - Affidabile rilevamento di movimento HF con indicatore a LED (rosso).

186370

BRIGHTNESSSENSOR IP65 - Monitoraggio affidabile dei livelli di luce con indicatore a LED (rosso).

SU RICHIESTA

- Alimentatore elettronico dimmerabile DALI.

MOUNTINGS

Suspended fitting

APPLICATION

Storage area, production area, manufacturing centre, elevated heights

BODY

In black painted die-cast aluminum.

ACCESSORIES

186311

MOVEMENTSENSOR HB 65 - Reliable HF motion detection with indication LED (red).

186370


BRIGHTNESSSENSOR IP65 - Reliable monitoring of light levels with indication LED (red).

ON REQUEST


- *DALI Dimmable electronic ballast.*



DISCO 8370

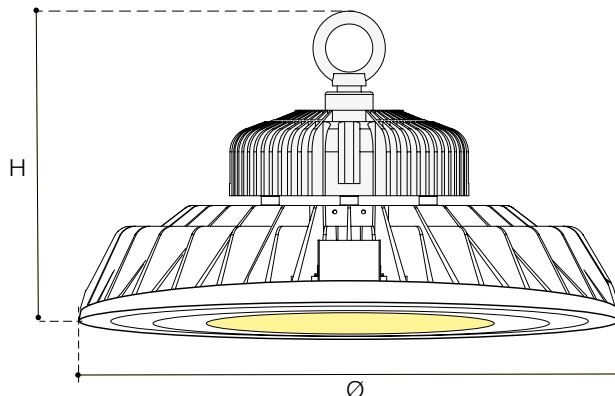

4000K | 21600 lm | 150W | 60°

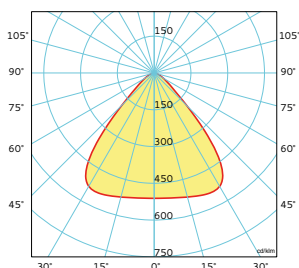

EMISSIONE LUMINOSA

Diretta - Simmetrica

DISPOSITIVO OTTICO

Lente in PMMA 60° / 90°

LIGHT EMISSION

Direct - Symmetric

OPTICAL DEVICE

Lens in PMMA 60° / 90°

CRI ≥80
CE
50k
GR-0
F
⊥
IP 65
IK 10

K	lm IN	W	B	Ø	H	EL. COD	DALI COD
4000	16000	100	60°	280	185	8370NW100E-60	-
4000	16000		90°			8370NW100E-90	-
4000	24000	100	60°	340	187	8370NW150E-60	8370NW150DD-60
4000	24000		90°			8370NW150E-90	8370NW150DD-90
4000	32000	150	60°	400	197	8370NW200E-60	8370NW200DD-60
4000	32000		90°			8370NW200E-90	8370NW200DD-90

FOLLOW US



Metalmek

Metalmek Illuminazione S.r.l.
I - 20045 Lainate (MI)
Via Ramazzotti, 10
Tel. +39 02 9373157
Fax +39 02 9371016
www.metalmek.info
info@metalmek.eu

Metalmek Lighting BV
Canadabaan 7d
NL - 5388 RT Nistelrode
Tel. +31 412 614033
Fax +31 412 613461
www.metalmek.nl
info@metalmek.nl