



LIGHTING COLLECTION

Metalmek





METALMEK



FARETTI A INCASSO / RECESSED SPOTLIGHT

INSTALLAZIONE

Incasso, a controsoffitto tramite molle a contrasto

APPLICAZIONI

Area commerciale, corridoio pubblico, locale pubblico, locale residenziale, negozio

CORPO

In pressofusione di alluminio verniciato

COLORI FINITURE

Bianco

SU RICHIESTA

Alimentatore elettronico dimmerabile PUSH.
Alimentatore elettronico dimmerabile 1-10V.
Alimentatore elettronico dimmerabile DALI.
Ra 90.

ACCESSORI

6390LED501H
Kit per luce d'emergenza per power LED e moduli LED.

MOUNTINGS

Built-in fitting, recessing by means of clips

APPLICATION

Commercial area, public corridor, public hall, residential hall, shop

BODY

In die-cast aluminium, painted

FINISHING COLOURS

White

ON REQUEST

*Dimmable electronic ballast PUSH.
Dimmable electronic ballast 1-10V.
DALI dimmable electronic ballast.
Ra 90.*

ACCESSORIES

*6390LED501H
Emergency lighting kit for power LED and LED modules.*

SALERNO ROUND **8882**

182


SALERNO SQUARE **8883**

183




SALERNO ROUND


8882

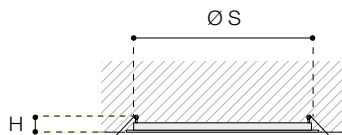

Ø 170




Ø 225

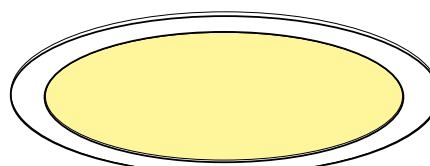

Ø 295

4000K | 2481 lm | 24W

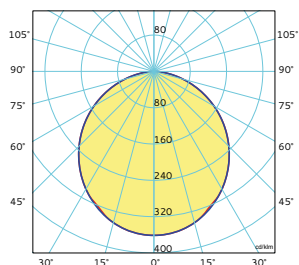

CORPO

In pressofusione di alluminio verniciato **bianco**

EMISSIONE LUMINOSA

Diretta - Simmetrica

DISPOSITIVO OTTICO

Diffusore in metacrilato opale.

BODY

In die-cast aluminium, painted **white**

LIGHT EMISSION

Direct - Symmetric

OPTICAL DEVICE

Diffuser in opal methacrylate, thermoformed in one piece.





| K | mA | lm IN | W | H | Ø | Ø S | EL. COD | DALI COD |
|------|-----|-------------|----|----|-----|-----|-----------------|-----------------|
| 3000 | 300 | 1021 / 1045 | 12 | 20 | 170 | 155 | 88823WW0170E0B0 | 88823WW0170DDB0 |
| | 300 | 1817 / 1890 | 18 | | 225 | 205 | 88823WW0225E0B0 | 88823WW0225DDB0 |
| | 500 | 2433 / 2481 | 24 | | 295 | 280 | 88823WW0295E0B0 | 88823WW0295DDB0 |
| 4000 | 300 | 1021 / 1045 | 12 | 20 | 170 | 155 | 88823NW0170E0B0 | 88823NW0170DDB0 |
| | 300 | 1817 / 1890 | 18 | | 225 | 205 | 88823NW0225E0B0 | 88823NW0225DDB0 |
| | 500 | 2433 / 2481 | 24 | | 295 | 280 | 88823NW0295E0B0 | 88823NW0295DDB0 |




SALERNO SQUARE


8883

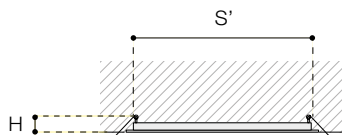

170X170




220X220

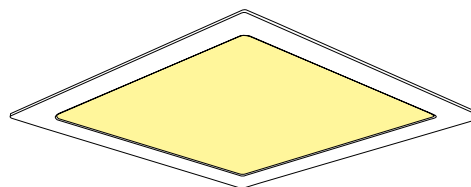

300X300

4000K | 2014 lm | 24W

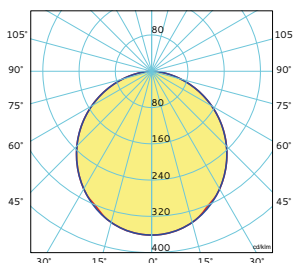

CORPO

In pressofusione di alluminio verniciato **bianco**

EMISSIONE LUMINOSA

Diretta - Simmetrica

DISPOSITIVO OTTICO

Diffusore in metacrilato opale.

BODY

In die-cast aluminium, painted **white**

LIGHT EMISSION

Direct - Symmetric

OPTICAL DEVICE

Diffuser in opal methacrylate, thermoformed in one piece.

| K | mA | lm IN | W | H | DxL | S' | EL. COD | DALI COD |
|------|-----|-------------|----|----|---------|-----|-----------------|-----------------|
| 3000 | 300 | 1094 / 1162 | 12 | 20 | 170x170 | 155 | 88833WW0170E0B0 | 88833WW0170DDB0 |
| | 300 | 1729 / 1840 | 18 | | 220x220 | 205 | 88833WW0220E0B0 | 88833WW0220DDB0 |
| | 500 | 1962 / 2014 | 24 | | 300x300 | 280 | 88833WW0300E0B0 | 88833WW0300DDB0 |
| 4000 | 300 | 1094 / 1162 | 12 | 20 | 170x170 | 155 | 88823NW0170E0B0 | 88823NW0170DDB0 |
| | 300 | 1729 / 1840 | 18 | | 220x220 | 205 | 88833NW0220E0B0 | 88833NW0220DDB0 |
| | 500 | 1962 / 2014 | 24 | | 300x300 | 280 | 88833NW0300E0B0 | 88833NW0300DDB0 |

FOLLOW US



Metalmek

Metalmek Illuminazione S.r.l.
I - 20045 Lainate (MI)
Via Ramazzotti, 10
Tel. +39 02 9373157
Fax +39 02 9371016
www.metalmek.info
info@metalmek.eu

Metalmek Lighting BV
Canadabaan 7d
NL - 5388 RT Nistelrode
Tel. +31 412 614033
Fax +31 412 613461
www.metalmek.nl
info@metalmek.nl