



BANDIT

BANDIT

Input Power	CRI & CCT Options	Cooling	Installation Type	Material	Warranty	Beam Angles	Luminaire Color
110 – 130V	CRI 80+ 3000K, 4000K, 5000K	Passive Cooling	NoA & Most 3-phase Tracks	Powder Painted Die-Cast Aluminum	50 000h Or 5 Years	1206 COB/ 1212 COB:	White (RAL 9016)
220 – 240V	CRI 90+ 2700K B.BBL, 3000K B.BBL, 3500K B.BBL, 4000K					S 10°/20° NFL 24°/- FL 30°/40° WFL 50°/60°	Silver (Ca. RAL 9006)
							Black (RAL 9005)

Output Current /
Module Wattage /
Luminaire Wattage:

LED Module: Citizen CLU038-1206 5Gen – COB luminous flux:

Power: 250mA – 1200mA

500mA / 18W / 20W

CRI 80+
3 000K

CRI 80+
4 000K

CRI 80+
5 000K

CRI 90+
2 700K
Below BBL

CRI 90+
3 000K
Below BBL

CRI 90+
3 500K
Below BBL

CRI 90+
4 000K

2 725Lm

2 800Lm

2 850Lm

2 050Lm

2 125Lm

2 175Lm

2 325Lm

900mA / 33W / 35W

4 425Lm

4 550Lm

4 625Lm

3 325Lm

3 475Lm

3 550Lm

3 750Lm

1050mA / 39W / 43W

4 975Lm

5 125Lm

5 200Lm

3 725Lm

3 900Lm

3 975Lm

4 225Lm

LED Module: Citizen CLU048-1212 5Gen – COB luminous flux:

Power: 250mA – 1400mA

700mA / 24W / 28W

3 900Lm

4 025Lm

4 100Lm

2 950Lm

3 075Lm

3 125Lm

3 325Lm

1050mA / 36W / 41W

5 575Lm

5 750Lm

5 825Lm

4 200Lm

4 375Lm

4 450Lm

4 750Lm

1400mA / 50W / 55W

7 000Lm

7 200Lm


7 300Lm

5 250Lm

5 500Lm

5 600Lm

5 950Lm

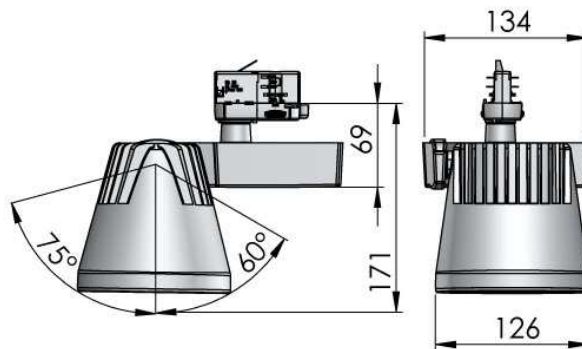

IP20

LED Design | Made In Finland

LIVAL