


Nobile Italia

Questione di luce.
Light matters.



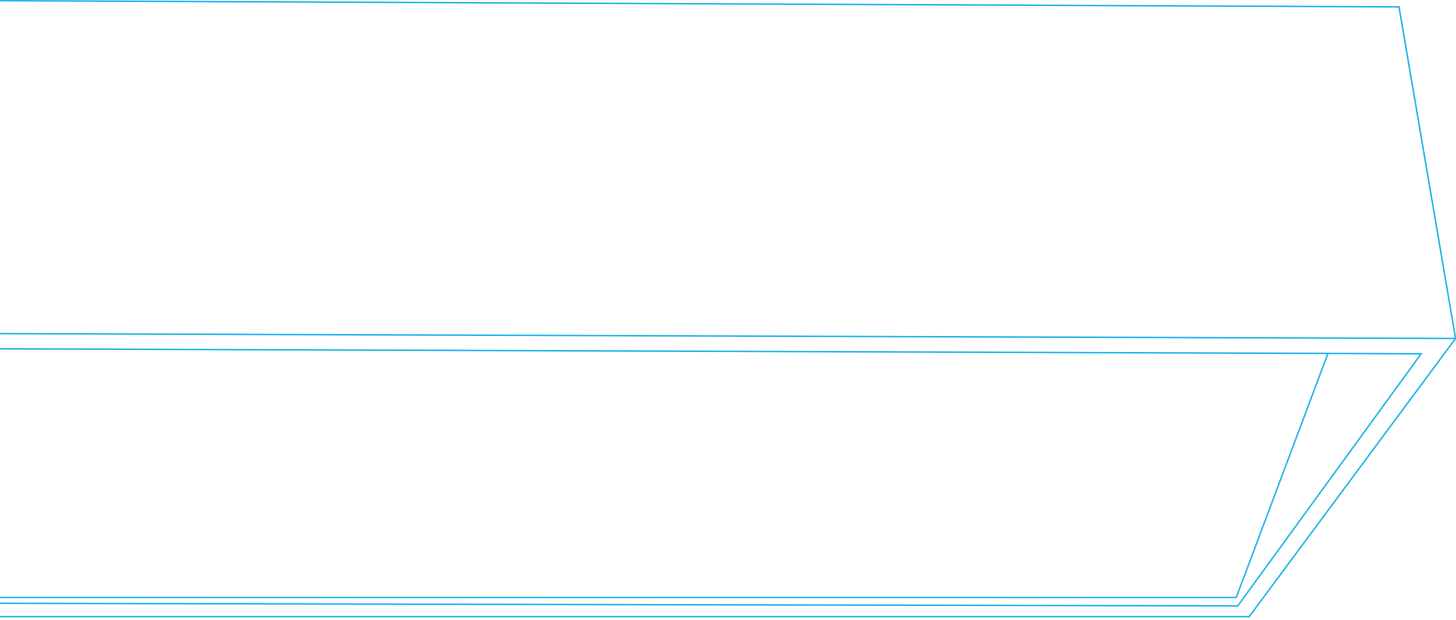


→ Apparecchi LED a parete.

Alimentatore 220-240V - 50/60Hz incluso.

Wall-mounted LED luminaire.


220-240V - 50/60Hz power supply included.

DL014

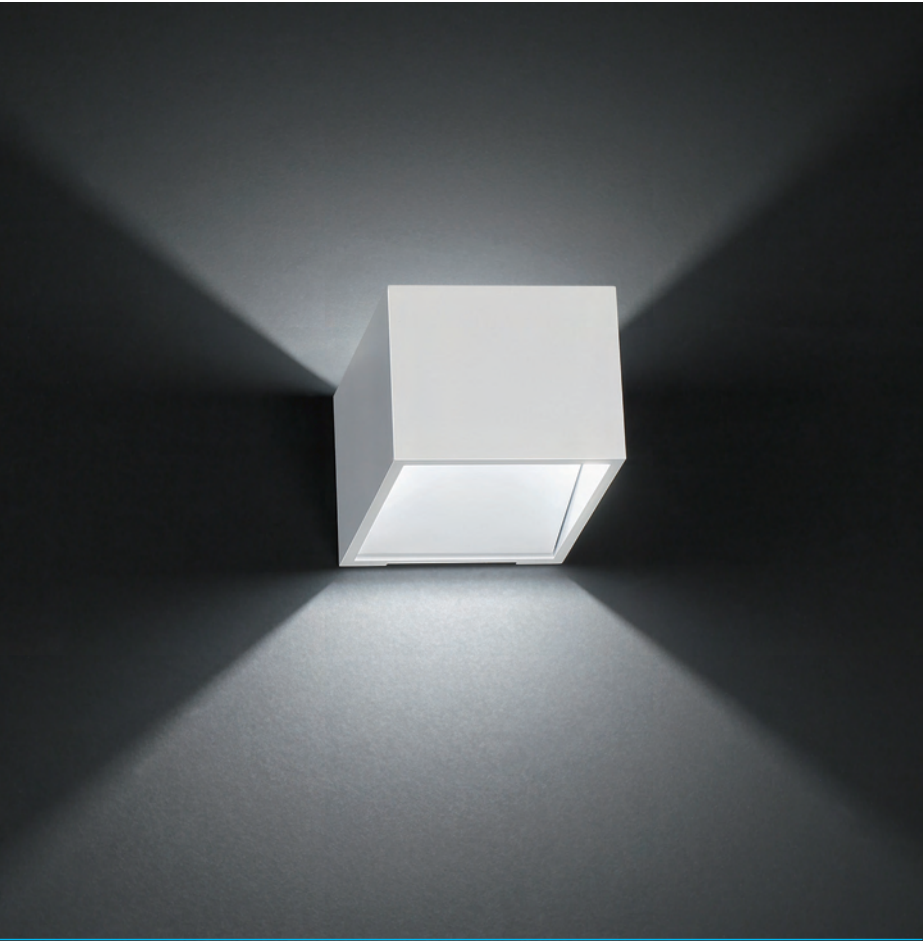

DL014

Code	Nominal lumen	W	CCT	Driver
DL014/BI	270	3,5	3000K	on-off
DL014/AL	270	3,5	3000K	on-off



Caratteristiche generali della linea di prodotto — General features of the product line

CRI 90	DRIVER INCLUDED	BI	AL	IP20	CE	F	⊕	A++	A+	A
-----------	--------------------	----	----	------	----	---	---	-----	----	---

DL014 Caratteristiche

Apparecchio LED a parete a luce indiretta.

LED Citizen. Life time 40.000h (rendimento 70%).

Corpo in alluminio pressofuso verniciato bianco opaco o alluminio.

Alimentatore 220-240V - 50/60Hz incluso.

Features

Wall-mounted LED luminaire for indirect light effect.

Citizen LED. Life time 40.000h (70% lumen maintenance).

Body in die-cast aluminium painted mat white or aluminium.


220-240V - 50/60Hz power supply included.

DL015



DL015

Code	Nominal lumen	W	CCT	Driver
DL015/BI	2x800	2x7,5	3000K	on-off
DL015/AL	2x800	2x7,5	3000K	on-off

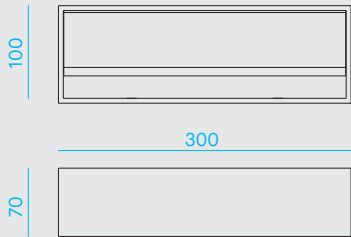

Caratteristiche generali della linea di prodotto — General features of the product line



DL015 Caratteristiche

Apparecchio LED a parete a luce indiretta.

LED Citizen. Life time 40.000h (rendimento 70%).

Corpo in alluminio pressofuso verniciato bianco opaco o alluminio.

Alimentatore 220-240V - 50/60Hz incluso.

Features

Wall-mounted LED luminaire for indirect light effect.

Citizen LED. Life time 40.000h (70% lumen maintenance).

Body in die-cast aluminium painted mat white or aluminium.

220-240V - 50/60Hz power supply included.

Metalmek Lighting B.V

Canadabaan7-d
5388 RT Nistelrode
Tel. 0412-614033
Fax 0412-613461

info@metalmek.nl
www.metalmek.nl

Metalmek

Cariboni
group

GVA
LIGHTING

LIVAL

NORDIC  **ALUMINIUM**