




DL030

Code	Nominal lumen	W	CCT	Beam
DL030/BI	650	7,5	3000K	40°
DL030/BR	650	7,5	3000K	40°
DL030/NE	650	7,5	3000K	40°



CRI

82

40°

BI

NE

BR

DRIVER INCLUDED

IP20

CE

F

A++

A+

A

Apparecchio tubolare LED per installazione a sospensione.

Cylinder suspended pendant light.

Appareil LED pour installation au plafond en suspension.

Rohr LED-Leuchte für abgehängte Installation.

LED SHARP.

SHARP LED.

LED SHARP.

SHARP LED.

Life time 40.000h (rendimento 70%).

Life time 40.000h (70%lumen maintenance).

Durée de vie 40.000h (rendement 70%).

Lebensdauer 40.000h (Lichtstrom 70%).

Corpo in alluminio verniciato bianco, nero o bronzo antico scuro.

White, black or dark bronze aluminium body.

Corps en aluminium peint blanc, noir ou bronze foncé.

Gehäuse aus weiss, schwarz oder antik dunkel bronz lackiertem Aluminium.

Lunghezza cavo sospensione 1500mm.

Suspension cable length 1500mm.

Longueur câble suspension 1500mm.


Kabellänge 1500mm.

Alimentatore 220-240V - 50/60Hz incluso.

220-240V - 50/60Hz power supply included.

Alimentation 220-240V - 50/60Hz incluse.


Netzgerät 220-240V - 50/60Hz enthalten.

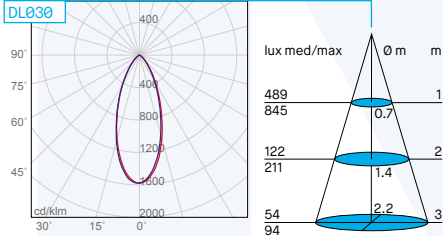



DL031

Code	Nominal lumen	W	CCT	Beam
DL031/BI	650	7,5	3000K	40°
DL031/BR	650	7,5	3000K	40°
DL031/NE	650	7,5	3000K	40°



CRI

82

40°

BI

NE

BR

DRIVER INCLUDED

IP20

CE

F

A++

A+

A

Apparecchio tubolare LED per installazione a sospensione.

Cylinder suspended pendant light.

Appareil LED pour installation au plafond en suspension.

Rohr LED-Leuchte für abgehängte Installation.

LED SHARP.

SHARP LED.

LED SHARP.

SHARP LED.

Life time 40.000h (rendimento 70%).

Life time 40.000h (70%lumen maintenance).

Durée de vie 40.000h (rendement 70%).

Lebensdauer 40.000h (Lichtstrom 70%).

Corpo in alluminio verniciato bianco, nero o bronzo antico scuro.

White, black or dark bronze aluminium body.

Corps en aluminium peint blanc, noir ou bronze foncé.

Gehäuse aus weiss, schwarz oder antik dunkel bronz lackiertem Aluminium.

Lunghezza cavo sospensione 1500mm.

Suspension cable length 1500mm.

Longueur câble suspension 1500mm.

Kabellänge 1500mm.

Alimentatore 220-240V - 50/60Hz incluso.

220-240V - 50/60Hz power supply included.

Alimentation 220-240V - 50/60Hz incluse.

Netzgerät 220-240V - 50/60Hz enthalten.

