



FIRST TRIO DL


- High efficient downlight with great aesthetic design
 - 1-10V, Push Dim, DALI & BLL compatible

FIRST TRIO DL

Input Power	CRI & CCT Options	Cooling	Installation Type	Material	Warranty	Beam Angles	Luminaire Color
110 – 130V	CRI 80+ 3000K, 4000K, 5000K	Passive Cooling	Recessed, Ceiling Mounted Luminaire	Powder Painted Die-Cast Aluminum	50 000h Or 5 Years	1206 COB/ 1212 COB:	White (RAL 9016)
220 – 240V	CRI 90+ 2700K B.BBL, 3000K B.BBL, 3500K B.BBL, 4000K					S 10°/20° NFL 24°/ - FL 30°/40° WFL 50°/60°	Silver (Ca. RAL 9006) Black (RAL 9005)

Output Current / Module Wattage / Luminaire Wattage:	LED Module: Citizen CLU038-1206							Power: 250mA – 1200mA
	CRI 80+ 3 000K	CRI 80+ 4 000K	CRI 80+ 5 000K	CRI 90+ 2 700K Below BBL	CRI 90+ 3 000K Below BBL	CRI 90+ 3 500K Below BBL	CRI 90+ 4 000K	
3x 500mA / 18W / 20W	3x 2 725Lm	3x 2 800Lm	3x 2 850Lm	3x 2 050Lm	3x 2 125Lm	3x 2 175Lm	3x 2 325Lm	
3x 900mA / 33W / 35W	3x 4 425Lm	3x 4 550Lm	3x 4 625Lm	3x 3 325Lm	3x 3 475Lm	3x 3 550Lm	3x 3 750Lm	
3x 1050mA / 39W / 43W	3x 4 975Lm	3x 5 125Lm	3x 5 200Lm	3x 3 725Lm	3x 3 900Lm	3x 3 975Lm	3x 4 225Lm	

Output Current / Module Wattage / Luminaire Wattage:	LED Module: Citizen CLU048-1212							Power: 250mA – 1400mA
	CRI 80+ 3 000K	CRI 80+ 4 000K	CRI 80+ 5 000K	CRI 90+ 2 700K Below BBL	CRI 90+ 3 000K Below BBL	CRI 90+ 3 500K Below BBL	CRI 90+ 4 000K	
3x 700mA / 24W / 28W	3x 3 900Lm	3x 4 025Lm	3x 4 100Lm	3x 2 950Lm	3x 3 075Lm	3x 3 125Lm	3x 3 325Lm	
3x 1050mA / 36W / 41W	3x 5 575Lm	3x 5 750Lm	3x 5 825Lm	3x 4 200Lm	3x 4 375Lm	3x 4 450Lm	3x 4 750Lm	
3x 1400mA / 50W / 55W	3x 7 000Lm	3x 7 200Lm	3x 7 300Lm	3x 5 250Lm	3x 5 500Lm	3x 5 600Lm	3x 5 950Lm	

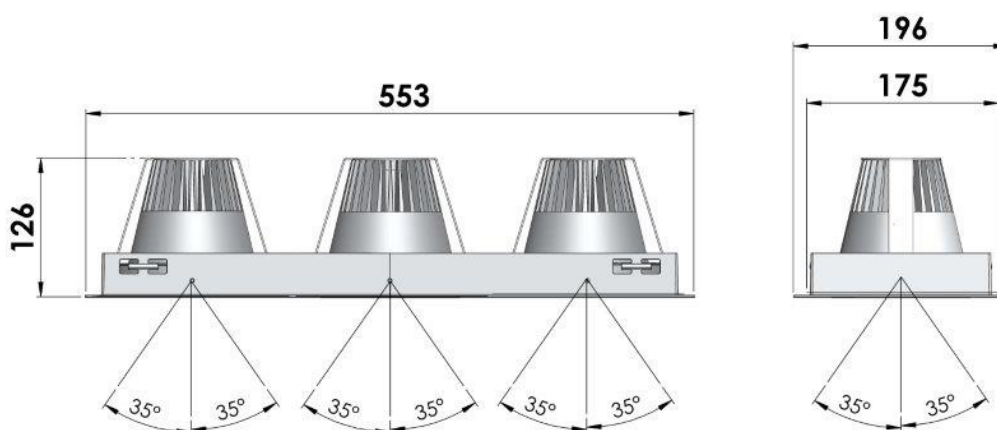

IP20

LED Design | Made In Finland



Metalmek Lighting B.V

Canadabaan7-d
5388 RT Nistelrode
Tel. 0412-614033
Fax 0412-613461

info@metalmek.nl
www.metalmek.nl

