



GA-016 BIG CYLINDER

GA-016 BIG CYLINDER


Input Power	LED Module *Citizen 6-Gen	Colour Consistency	Installation Type	Material	Warranty	Beam Angles	Luminaire Color
220 – 240V	CRI 80+ 3000K, 4000K, 5000K CRI 90+ 2700K B.BBL, 3000K B.BBL, 3500K B.BBL, 4000K	2-Step MacAdam	NoA & Most 3-phase Tracks	Powder Painted Die-Cast Aluminum	50 000h	1206 COB/ 1212 COB: S 10°/20° NFL 24°/- FL 30°/40° WFL 50°/60°	White (RAL 9016) Silver (Ca. RAL 9006) Black (RAL 9005)

LED Module: Citizen CLU038-1206 6-Gen – COB luminous flux:

Output Current / Module Wattage / System Wattage:	CRI 80+ 3 000K	CRI 80+ 4 000K	CRI 80+ 5 000K	CRI 90+ 2 700K Below BBL	CRI 90+ 3 000K Below BBL	CRI 90+ 3 500K Below BBL	CRI 90+ 4 000K
700mA / 25W / 28W	3 675Lm	3 775Lm	3 800Lm	2 875Lm	2 975Lm	3 025Lm	3 200Lm
750mA / 27W / 29W	3 875Lm	3 975Lm	4 025Lm	3 025Lm	3 150Lm	3 200Lm	3 375Lm
800mA / 29W / 31W	4 100Lm	4 200Lm	4 250Lm	3 200Lm	3 350Lm	3 375Lm	3 575Lm
850mA / 31W / 33W	4 325Lm	4 450Lm	4 475Lm	3 375Lm	3 525Lm	3 575Lm	3 750Lm

LED Module: Citizen CLU048-1212 6-Gen – COB luminous flux:

700mA / 23W / 26W	3 950Lm	4 050Lm	4 100Lm	3 075Lm	3 200Lm	3 250Lm	3 425Lm
750mA / 25W / 28W	4 200Lm	4 300Lm	4 350Lm	3 275Lm	3 400Lm	3 450Lm	3 650Lm
800mA / 27W / 30W	4 450Lm	4 550Lm	4 625Lm	3 475Lm	3 625Lm	3 675Lm	3 875Lm
850mA / 29W / 32W	4 700Lm	4 825Lm	4 875Lm	3 675Lm	3 825Lm	3 875Lm	4 075Lm

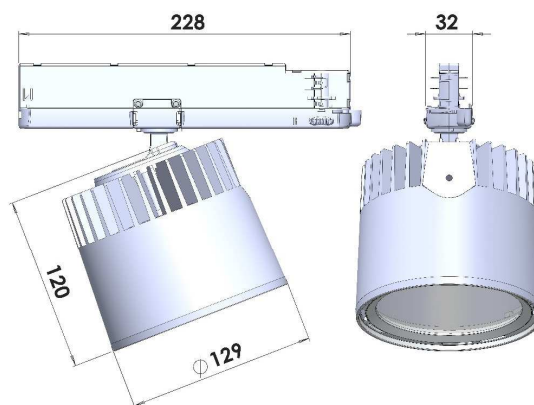

*COB efficacy –
Up to 170Lm/W

IP20

LED Design | Made In Finland

LIVAL