



GA-016 CAFETERIA

- Lival innovation – ECG fitted inside the adapter
- Good light in small form factor – no separate housing part

GA-016 CAFETERIA

Input Power	LED-Module *Citizen 6Gen	Colour Consistency	Installation Type	Material	Warranty	Beam Angles	Luminaire Color
220 – 240V	CRI 80+ 3000K, 4000K, 5000K CRI 90+ 2700K B.BBL, 3000K B.BBL, 3500K B.BBL, 4000K	2-Step MacAdam	Global XTS 3-phase Trac	Powder Painted Die-Cast Aluminum	50 000h Or 5 Years	1206 COB: S 15° NFL 20° FL 30° WFL 50°	White (RAL 9016) Silver (Ca. RAL 9006) Black (RAL 9005)

LED Module: Citizen CLU038-1206 6-Gen – COB luminous flux:

Output Current /
Module Wattage /
System Wattage:


700mA / 25W / 27W

750mA / 27W / 29W

800mA / 29W / 31W

850mA / 31W / 33W

CRI 80+ 3 000K	CRI 80+ 4 000K	CRI 80+ 5 000K	CRI 90+ 2 700K Below BBL	CRI 90+ 3 000K Below BBL	CRI 90+ 3 500K Below BBL	CRI 90+ 4 000K
3 625Lm	3 700Lm	3 750Lm	2 825Lm	2 950Lm	2 975Lm	3 150Lm
3 825Lm	3 925Lm	3 975Lm	3 000Lm	3 100Lm	3 150Lm	3 325Lm
4 025Lm	4 125Lm	4 175Lm	3 150Lm	3 275Lm	3 325Lm	3 500Lm
4 225Lm	4 325Lm	4 375Lm	3 300Lm	3 425Lm	3 475Lm	3 675Lm

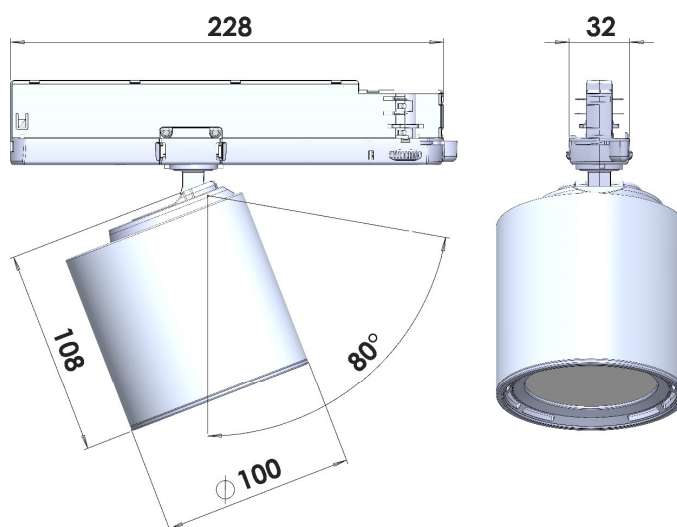

IP20

LED Design | Made In Finland

LIVAL

Metalmek Lighting B.V

Canadabaan7-d
5388 RT Nistelrode
Tel. 0412-614033
Fax 0412-613461

info@metalmek.nl
www.metalmek.nl

