

GAC-616 CASA DALI

- DALI dimmable electronic controlling gear inside track adapter
 - High-quality light in small form factor


Input Power	LED-Module *Citizen 6-Gen	Color Consistency	Installation Type	Material	Warranty	Beam Angles	Luminaire Color
220 – 240V	CRI 80+ 3000K, 3500K 4000K, 5000K	2-Step MacAdam	Nordic Aluminium Global Pulse Tracks	Powder Painted Die-Cast Aluminum	50 000h Or 5 Years	1206 COB: S 15°	White (RAL 9016)
	CRI 90+ 2700K B.BBL, 3000K B.BBL, 3500K B.BBL, 4000K					FL 21°	Silver (Ca. RAL 9006)
						WFL 32° VWFL 46°	Black (RAL 9005)

LED Module: Citizen CLU038-1206 6Gen – COB luminous flux:

Output Current /
Module Wattage /
System Wattage:

	CRI 80+ 3 000K	CRI 80+ 4 000K	CRI 80+ 5 000K	CRI 90+ 2 700K Below BBL	CRI 90+ 3 000K Below BBL	CRI 90+ 3 500K Below BBL	CRI 90+ 4 000K
325mA / 11W / 13W	1 750Lm	1 800Lm	1 825Lm	1 300Lm	1 350Lm	1 400Lm	1 475Lm
550mA / 19W / 21W	2 850Lm	2 950Lm	2 975Lm	2 150Lm	2 250Lm	2 300Lm	2 425Lm
700mA / 24W / 27W	3 450Lm	3 550Lm	3 600Lm	2 700Lm	2 800Lm	2 850Lm	3 000Lm

Technical dimensions:

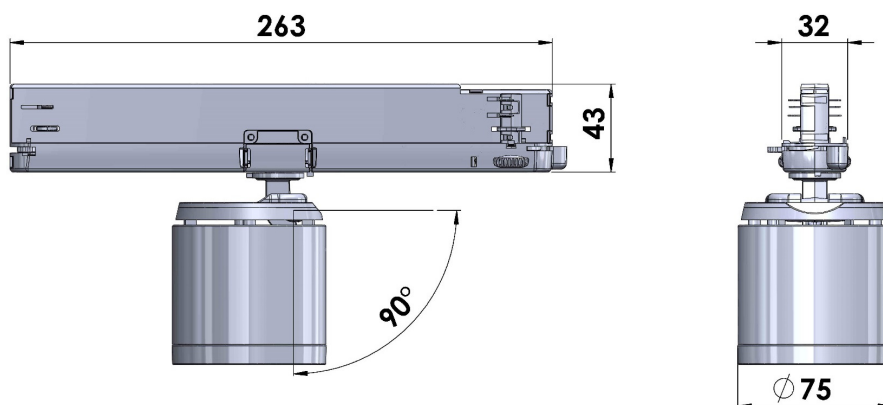

IP20

LED Design | Made In Finland

LIVAL