



GA-016 LEAN

- Popular Lean head with GA-016 electronic adapter

GA-016 LEAN

Input Power	LED Module CRI & CCT	Colour Consistency	Installation Type	Material	Warranty	Beam Angles	Luminaire Color
220 – 240V	CRI 80+ 3000K, 4000K, 5000K CRI 90+ 2700K B.BBL, 3000K B.BBL, 3500K B.BBL, 4000K	3-Step MacAdam	NoA & Most 3-phase Tracks	Powder Painted Die-Cast Aluminum	50 000h Or 5 Years	1206 COB/ 1212 COB: S 10°/20° NFL 24°/- FL 30°/40° WFL 50°/60°	White (RAL 9016) Silver (Ca. RAL 9006) Black (RAL 9005)

LED Module: Citizen CLU038-1206 5-Gen – COB luminous flux:

Output Current /
Module Wattage /
System Wattage:

700mA / 25W / 28W

750mA / 27W / 29W

800mA / 29W / 31W

850mA / 31W / 33W

CRI 80+ 3 000K	CRI 80+ 4 000K	CRI 80+ 5 000K	CRI 90+ 2 700K Below BBL	CRI 90+ 3 000K Below BBL	CRI 90+ 3 500K Below BBL	CRI 90+ 4 000K
3 575Lm	3 675Lm	3 725Lm	2 725Lm	2 825Lm	2 875Lm	3 050Lm
3 725Lm	3 850Lm	3 900Lm	2 825Lm	2 950Lm	3 000Lm	3 200Lm
4 000Lm	4 100Lm	4 175Lm	3 000Lm	3 125Lm	3 200Lm	3 425Lm
4 175Lm	4 300Lm	4 375Lm	3 150Lm	3 300Lm	3 350Lm	3 550Lm

LED Module: Citizen CLU048-1212 5-Gen – COB luminous flux:


700mA / 24W / 27W

750mA / 26W / 29W

800mA / 27W / 30W

850mA / 29W / 32W

3 900Lm	4 025Lm	4 100Lm	2 950Lm	3 075Lm	3 125Lm	3 325Lm
4 150Lm	4 300Lm	4 350Lm	3 125Lm	3 250Lm	3 325Lm	3 525Lm
4 400Lm	4 550Lm	4 600Lm	3 300Lm	3 450Lm	3 525Lm	3 750Lm
4 650Lm	4 800Lm	4 850Lm	3 500Lm	3 650Lm	3 725Lm	3 950Lm

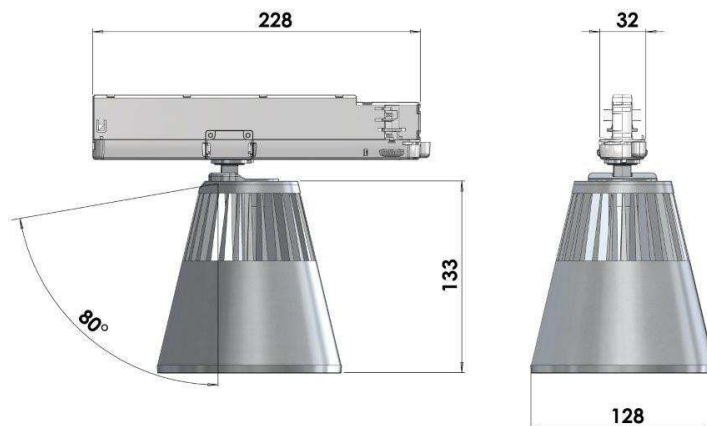

IP20

LED Design | Made In Finland

LIVAL