



GA-2020 STANDARD

- Lival innovation – ECG fitted inside the adapter
 - Good light in small form factor


GA-2020 STANDARD

Input Power	LED-Module *Citizen 6-Gen	Color Consistency	Installation Type	Material	Warranty	Beam Angles	Luminaire Color
220 – 240V	CRI 80+ 3000K, 4000K, 5000K CRI 90+ 2700K B.BBL, 3000K B.BBL, 3500K B.BBL, 4000K	MacAdam 2-Step	NoA & Most 3-phase Tracks	Powder Painted Die-Cast Aluminum	50 000h Or 5 Years	1206 COB: S 15° NFL 20° FL 30° WFL 50°	White (RAL 9016) Silver (Ca. RAL 9006) Black (RAL 9005)

Output Current /
Module Wattage /
System Wattage:

LED Module: Citizen CLU038-1206 6Gen – COB Luminous flux:

	CRI 80+ 3 000K	CRI 80+ 4 000K	CRI 80+ 5 000K	CRI 90+ 2 700K Below BBL	CRI 90+ 3 000K Below BBL	CRI 90+ 3 500K Below BBL	CRI 90+ 4 000K
300mA / 10W / 11W	1 725Lm	1 775Lm	1 800Lm	1 325Lm	1 375Lm	1 400Lm	1 475Lm
350mA / 12W / 14W	1 975Lm	1 225Lm	2 050Lm	1 525Lm	1 575Lm	1 600Lm	1 700Lm
400mA / 14W / 16W	2 225Lm	2 275Lm	2 300Lm	1 725Lm	1 775Lm	1 825Lm	1 900Lm
440mA / 15W / 17W	2 400Lm	2 475Lm	2 500Lm	1 875Lm	1 950Lm	1 975Lm	2 075Lm

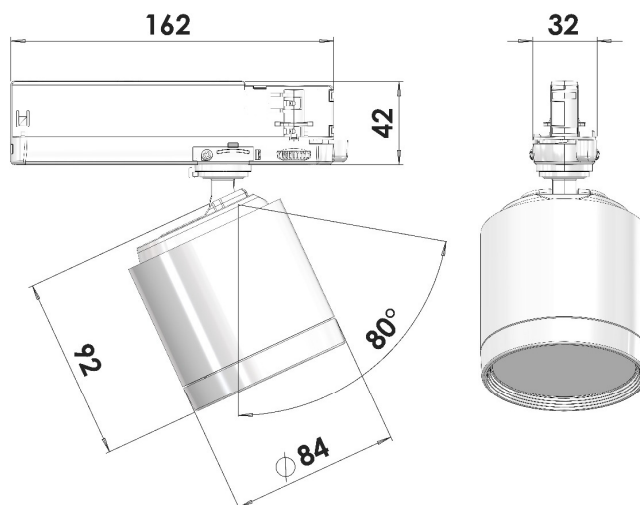

IP20

LED Design | Made In Finland

LIVAL

Metalmek Lighting B.V

Canadabaan7-d
5388 RT Nistelrode
Tel. 0412-614033
Fax 0412-613461

info@metalmek.nl
www.metalmek.nl

