


ENVIRONMENT IN MIND

GLOBAL^{trac}® BASE



LIGHTING
IS A KEY FACTOR
IN CREATING
THE GOOD
FEELING

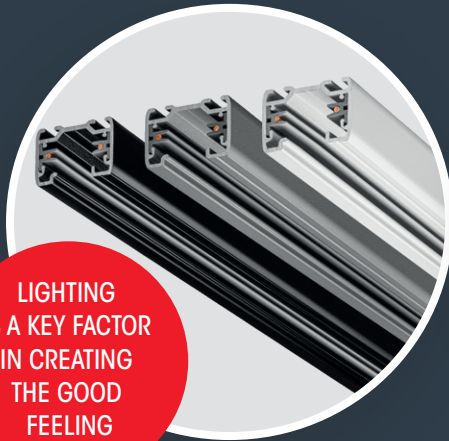

BASE 1 CCT

APPLICATION

- Buildings (hospitality)
- Retail (supermarkets, shops)
 - Office
- Restaurants and Cafes
 - Residential
 - Homes



- Quality in focus

NORDIC  ALUMINIUM

 LIVAL GROUP

BASE LUMINAIRES

● BING BASE

Up to 125lm/W at CRI 90+



COB 1206/1208
15°, 21°, 3d 25°, 32°, 46°
COB 1212 25°
net weight 460 g

● BINGO BASE

Up to 125lm/W at CRI 90+



COB 1206/1208
15°, 21°, 3d 25°, 32°, 46°
COB 1212 25°
net weight 620 g

● DINGO BASE

Up to 125lm/W at CRI 90+



COB 1206/1208
15°, 3d 24°, 3d 36°, 3d 55°
Net weight 690 g

● CASA BASE

Up to 125lm/W at CRI 90+



COB 1206/1208
15°, 21°, 3d 25°, 32°, 46°
COB 1212 25°
net weight 450 g

● STANDARD BASE

Up to 125lm/W at CRI 90+



COB 1206/1208
15°, 21°, 3d 25°, 32°, 46°
COB 1212 25°
net weight 540 g

● CAFETERIA BASE


Up to 125lm/W at CRI 90+



COB 1206/1208
15°, 21°, 3d 25°, 32°, 46°
COB 1212 25°
Net weight 690 g

● DINGO PENDANT BASE

Up to 125lm/W at CRI 90+

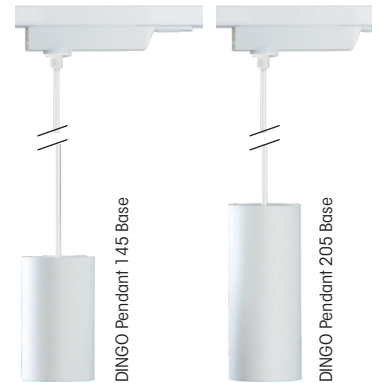

Combined efficiency of COB & Driver

1212 - 830

Current [A]	Flux [lm]	Power [W]	Efficacy [Lm/W]
0,300	1520,2	11,1	137,0
0,700	3412,0	27,0	126,4

1212 - 840

Current [A]	Flux [lm]	Power [W]	Efficacy [Lm/W]
0,300	1601,0	11,1	144,2
0,700	3593,0	27,0	133,1


1208 - 930 HE

Current [A]	Flux [lm]	Power [W]	Efficacy [Lm/W]
0,300	1486,0	11,9	124,9
0,700	3307,0	27,5	120,3

1208 - 940 HE

Current [A]	Flux [lm]	Power [W]	Efficacy [Lm/W]
0,300	1600,4	11,9	134,5
0,700	3561,6	27,5	129,5

GLOBAL TRAC BASE

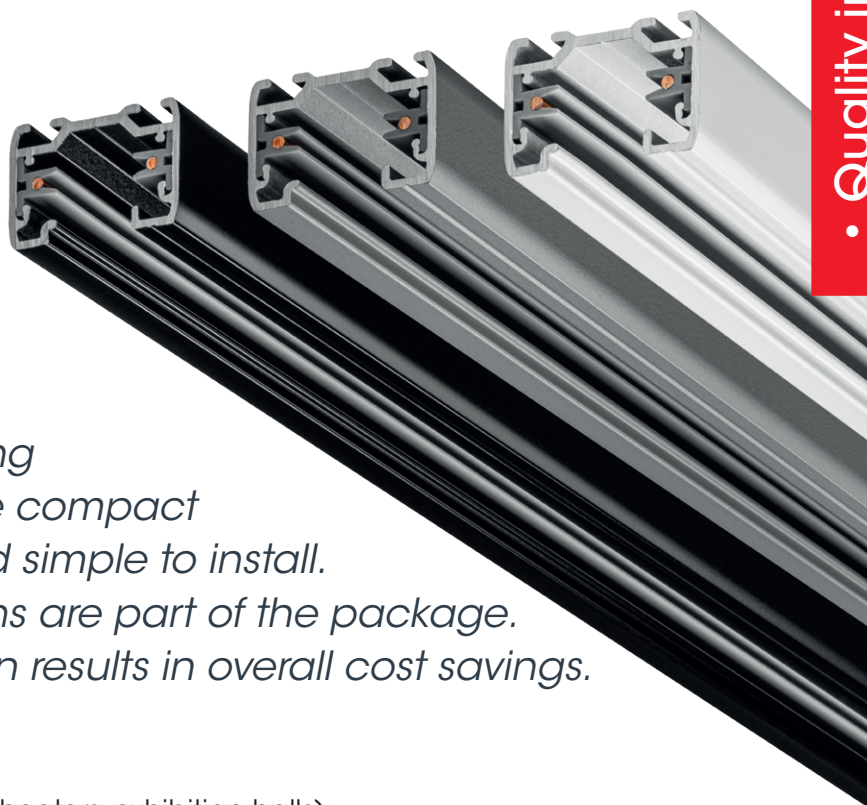


• Quality in focus

GLOBAL Trac Base is a compact, elegant looking one-circuit basic track. The compact track is light to handle and simple to install. Versatile installation options are part of the package. Quick and easy installation results in overall cost savings.


Application

- Public buildings (airports, cinemas, theaters, exhibition halls)
- Retail (supermarkets, shops)
- Office
- Residential area of use from homes to exhibition stands

GB Surface

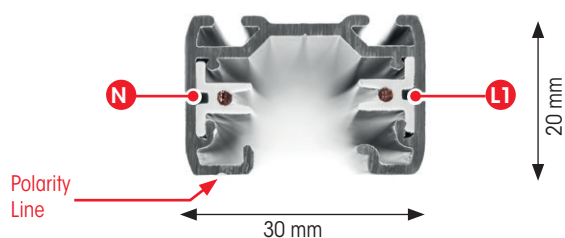

GBF Recessed

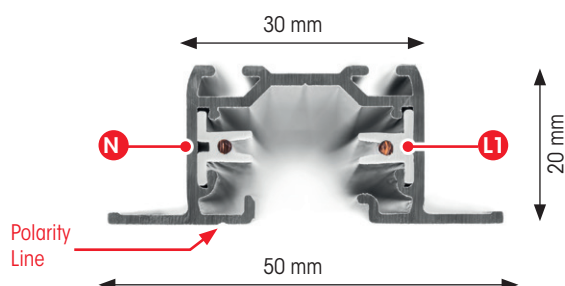


GLOBAL Trac Base

Power Conductor Cross-Section: 2,5mm²

Connection


230 V AC, 16 A, 3.7 kW

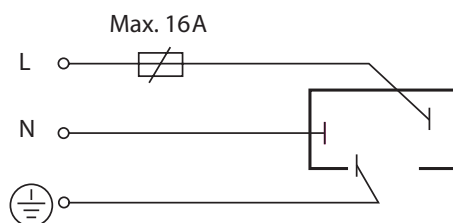

GLOBAL TRAC BASE TRACKS

Available colours: -1 grey (RAL 7040), -2 black (RAL 9005), -3 white (RAL 9016).


GB
2100-2300
Surface



Surface Mounted Tracks:

Purchase Code	Type	EAN code	Length (mm)	Colour	PCS/ Package
KKT30313	GB2100-1	6410014509019	1000	Grey	8/480
KKT30317	GB2100-2	6410014508012	1000	Black	8/480
KKT303111	GB2100-3	6410014509064	1000	White	8/480
KKT303121	GB2200-1	6410014509026	2000	Grey	8/480
KKT303125	GB2200-2	6410014508029	2000	Black	8/480
KKT303129	GB2200-3	6410014509071	2000	White	8/480
KKT303136	GB2300-1	6410014509033	3000	Grey	8/480
KKT303140	GB2300-2	6410014508036	3000	Black	8/480
KKT303144	GB2300-3	6410014509088	3000	White	8/480

GBF
2100-2300
Recessed



Recessed Tracks:

KKT303169	GBF2100-1	6410014509866	1000	Grey	6/180
KKT303172	GBF2100-2	6410014508913	1000	Black	6/180
KKT303174	GBF2100-3	6410014509910	1000	White	6/180
KKT303177	GBF2200-1	6410014509873	2000	Grey	6/180
KKT303180	GBF2200-2	6410014508920	2000	Black	6/180
KKT303182	GBF2200-3	6410014509927	2000	White	6/180
KKT303185	GBF2300-1	6410014509880	3000	Grey	6/180
KKT303188	GBF2300-2	6410014508937	3000	Black	6/180
KKT303190	GBF2300-3	6410014509934	3000	White	6/180


Outlet cover plate
GBF 10



Recessed Track Accessories:

KKT303281	GBF10-1	6410014501518	Cover plate : GB11-12	Grey	1/100
KKT303273	GBF10-2	6410014508821	Cover plate : GB11-12	Black	1/100
KKT303274	GBF10-3	6410014509828	Cover plate : GB11-12	White	1/100
KKT303271	GBF30-1	6410014501525	Cover plate : GB14-40	Grey	1/100
KKT303275	GBF30-2	6410014508838	Cover plate : GB14-40	Black	1/100
KKT303276	GBF30-3	6410014509835	Cover plate : GB14-40	White	1/100

GBF 30



• *Lightweight but Durable*

GLOBAL TRAC BASE ACCESSORIES

All materials are halogen free and VO self-extinguishing.

Available colours: -1 grey (RAL 7040), -2 black (RAL 9005), -3 white (RAL 9016).

End Feeds:

Purchase Code	Type	EAN code	Polarity Ridge	Colour	PCS/ Package
KKT30321	GB11-1	6410014509156		Grey	1/100
KKT30322	GB11-2	6410014508111		Black	1/100
KKT30324	GB11-3	6410014509118		White	1/100
KKT303210	GB12-1	6410014509163		Grey	1/100
KKT303211	GB12-2	6410014508128		Black	1/100
KKT303213	GB12-3	6410014509125		White	1/100

Global Trac Base connectors with power supply option:

KKT303230	GB34-1	6410014509255		Grey	1/25
KKT303231	GB34-2	6410014508340		Black	1/25
KKT303233	GB34-3	6410014509347		White	1/25
KKT303235	GB35-1	6410014509262		Grey	1/25
KKT303236	GB35-2	6410014508357		Black	1/25
KKT303238	GB35-3	6410014509354		White	1/25


KKT303240	GB36-1	6410014509279		Grey	1/25
KKT303241	GB36-2	6410014508364		Black	1/25
KKT303243	GB36-3	6410014509361		White	1/25
KKT303245	GB37-1	6410014509286		Grey	1/25
KKT303246	GB37-2	6410014508371		Black	1/25
KKT303248	GB37-3	6410014509378		White	1/25
KKT303255	GB39-1	6410014509309		Grey	1/25
KKT303256	GB39-2	6410014508395		Black	1/25
KKT303258	GB39-3	6410014509392		White	1/25
KKT303260	GB40-1	6410014509316		Grey	1/25
KKT303261	GB40-2	6410014508401		Black	1/25
KKT303263	GB40-3	6410014509408		White	1/25

KKT303250	GB38-1	6410014509293		Grey	1/25
KKT303251	GB38-2	6410014508388		Black	1/25
KKT303253	GB38-3	6410014509385		White	1/25

KKT303215	GB14-1	6410014509170	Grey	1/50
KKT303216	GB14-2	6410014508142	Black	1/50
KKT303218	GB14-3	6410014509149	White	1/50


End feed GB 11, 12

1. 55 mm, 2. 88 mm

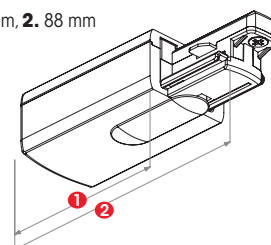


L-feed GB 34, 35

1. 55 mm, 2. 87 mm




T-feed GB 36, 37, 39, 40

1. 145 mm, 2. 80 mm, 3. 25 mm,
4. 55 mm, 5. 58 mm, 6. 88 mm

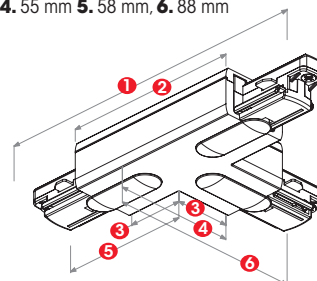


X-feed GB 38

1. 25 mm, 2. 80 mm, 3. 145 mm

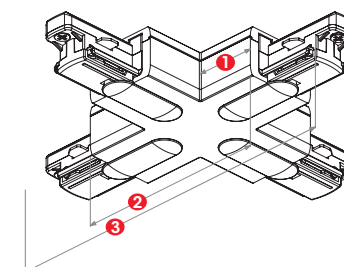


Middle feed GB 14

1. 80 mm, 2. 145 mm

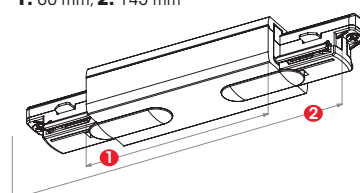

POLARITY IN BASE TRAC

Use of L-, T- and X- Feed. Red line indicates polarity ridge

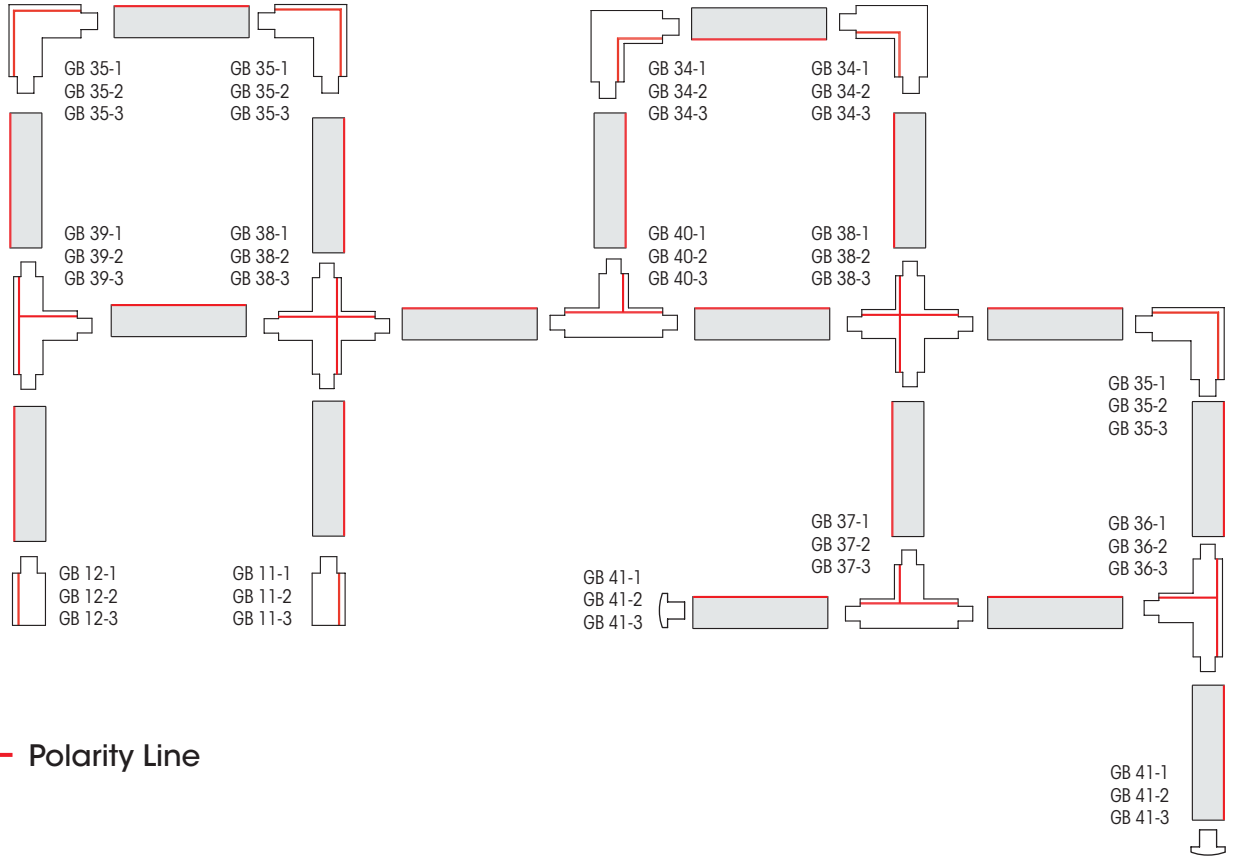

Connectors without option for power supply:

Purchase Code	Type	EAN code	Colour	PCS/Package
KKT303220	GB21-1	6410014509187	Grey	1/100
KKT303221	GB21-2	6410014508210	Black	1/100
KKT303223	GB21-3	6410014509217	White	1/100

KKT303225	GB24-1	6410014509194	Grey	1/25
KKT303226	GB24-2	6410014508241	Black	1/25
KKT303228	GB24-3	6410014509248	White	1/25


End Cap:

KKT303265	GB41-1	6410014509323	Grey	1/100
KKT303266	GB41-2	6410014508418	Black	1/100
KKT303268	GB41-3	6410014509415	White	1/100

- Flexible & Affordable



Straight Connector

GB 21
1. 65 mm

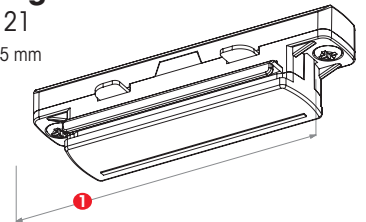

Adjustable corner connector GB 24

1. 100 mm, 2. 165 mm

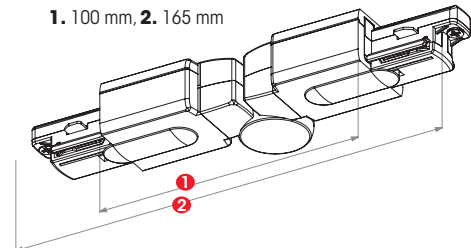

End cap GB 41
1. 4 mm, 2. 24 mm

1-CIRCUIT ADAPTERS

Purchase Code	Type	EAN code	Description	Colour	PCS / Package
KKT30333	GB66-1	6410014509651	6A 30N Slot connection	Grey	1/100
KKT30334	GB66-2	6410014508661	6A 30N Slot connection	Black	1/100
KKT30336	GB66-3	6410014509668	6A 30N Slot connection	White	1/100
KKT303339	GB66L-1	6410014501457	6A 30N Slot connection	Grey	100
KKT303317	GB66L-2	6410014501464	6A 30N Slot connection	Black	100
KKT303319	GB66L-3	6410014501471	6A 30N Slot connection	White	100


GB 66 Wiring Options:

- To be used with stranded 0.5 ... 1.0mm² wire
- Slot Connection. The conductors are pressed into the connectors by the connector lid or by the cable mounting tool. GB 66CT.

KKT303321	GB67-1	6410014509736	16A 100N Screw connection	Grey	1/100
KKT303322	GB67-2	6410014508678	16A 100N Screw connection	Black	1/100
KKT303323	GB67-3	6410014509675	16A 100N Screw connection	White	1/100
KKT303327	GB67L-1	6410014501488	16A 100N Screw connection	Grey	100
KKT303328	GB67L-2	6410014501495	16A 100N Screw connection	Black	100
KKT303329	GB67L-3	6410014501501	16A 100N Screw connection	White	100
KKT3033271	GB67M-1	6410014500214	16A 100N Screw connection	Grey	100
KKT3033281	GB67M-2	6410014500221	16A 100N Screw connection	Black	100
KKT3033291	GB67M-3	6410014500238	16A 100N Screw connection	White	100


GB 67 Wiring Options:

- 1-Circuit: Connecting max. 1.5 ... 2.5mm² wire
- Optional cable grip CG 69 (Not suitable for GB 67M)

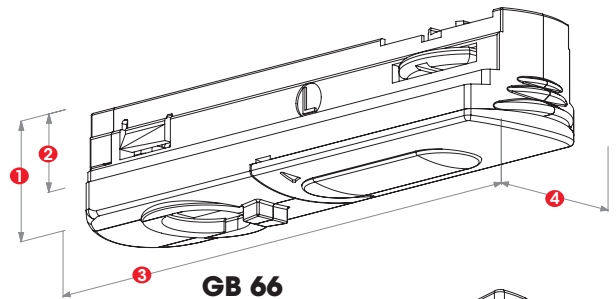


GB 66

1. 16 mm 2. 10 mm
3. 78 mm 4. 19 mm

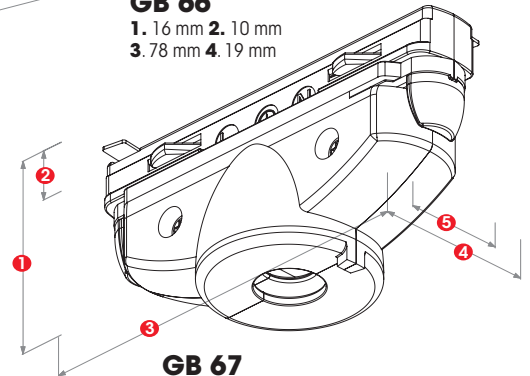

GB 67

1. 40 mm 2. 10 mm 3. 84 mm
4. 34 mm 5. 21 mm

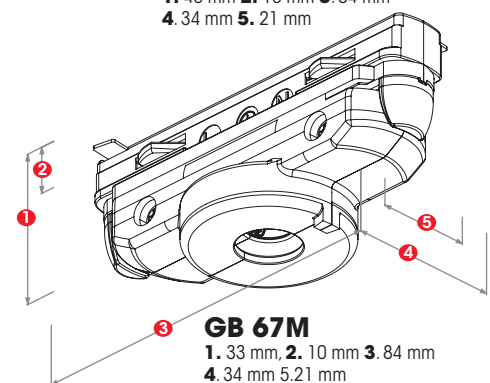

GB 67M

1. 33 mm 2. 10 mm 3. 84 mm
4. 34 mm 5. 21 mm

NORDIC ALUMINIUM

LIVAL Porvoo

Sipoo

Helsinki

Pikkala

GLOBAL TRAC®

Ready to Deliver Around the Globe

We are all about innovative engineering, sustainability and authenticity. We set the standard in manufacturing the world's most used electrical track solutions known as **Global Trac**.

As a result, our track systems come with many certificates such as: *)



Our **comprehensive portfolio of track lighting systems** is designed to fully meet the lighting challenges of today.

*) Certificates to vary regionally and between product families

EVOLUTION ON TRACKS

NEW

GLOBAL trac® BASE



TRACKS & LUMINAIRES

Commercial & domestic


- Small form factors
- Vast potential for energy saving
- Easy to install



Environment in mind

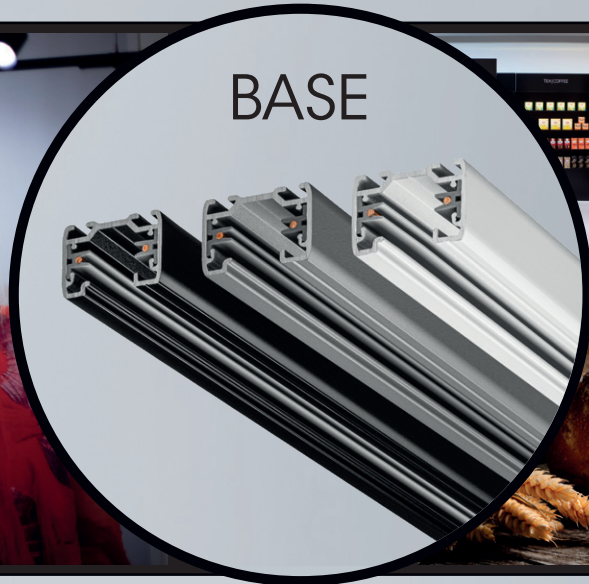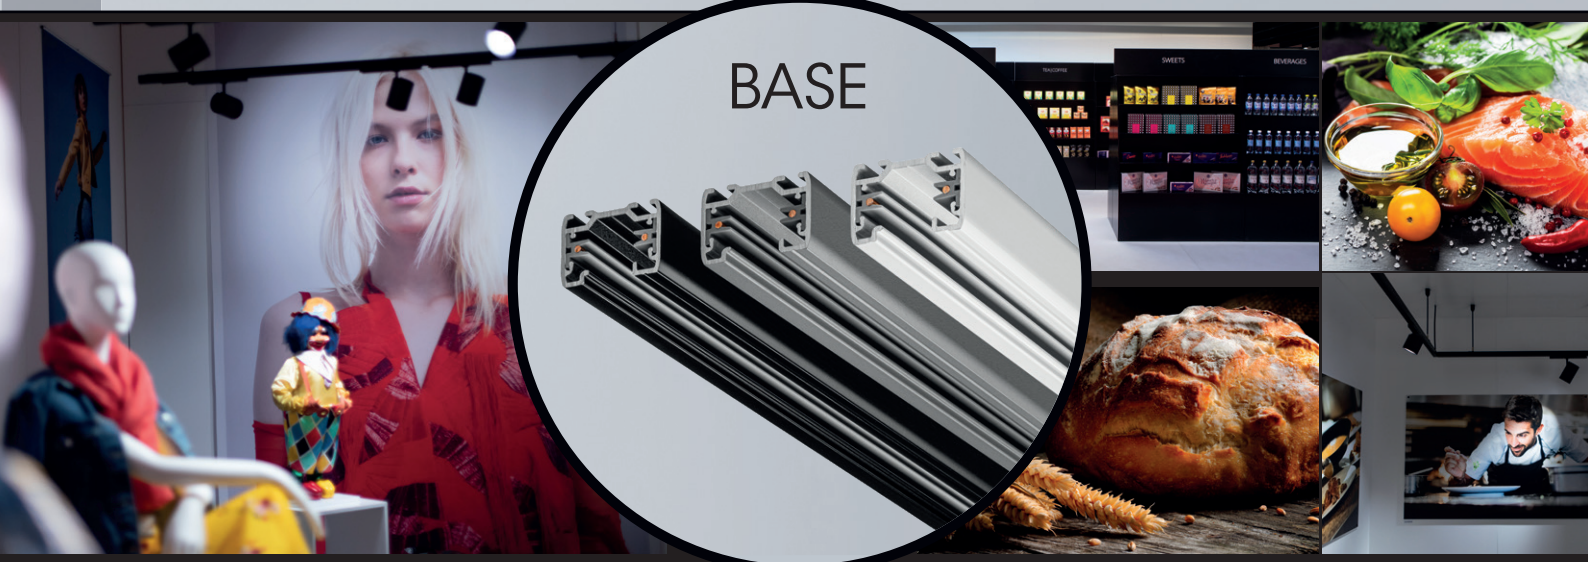

SMART

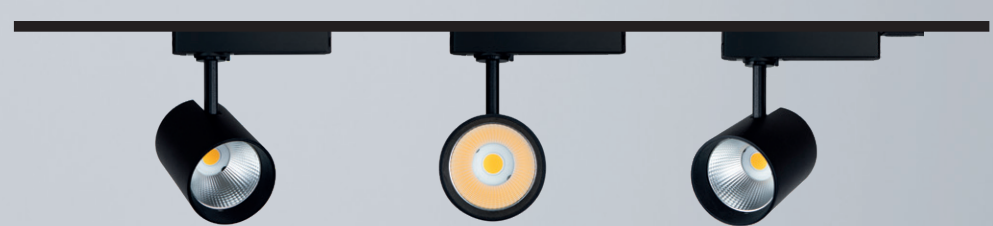

LIVAL **NORDIC ALUMINIUM**

Lukkarinmäentie 1, 04130 Sipoo, Finland • lival@lival.com

Metalmek Lighting B.V

Canadabaan7-d
5388 RT Nistelrode
Tel. 0412-614033

info@metalmek.nl
www.metalmek.nl