

N3

GRACE

GRACE è la soluzione, compatta ed elegante,
per l'illuminazione radente di aree
e percorsi pedonali.

GRACE is a compact and elegant solution for
grazing light in pedestrian areas and pathways.





DATI PRESTAZIONALI / PERFORMANCE DATA

Flusso apparecchio / Fitting flux:
105 - 340 lm

Potenza apparecchio / Fitting power:
2 - 5 W

Indice di resa cromatica / Colour Rendering Index:
CRI ≥ 80, SDCM ≤ 3

Illuminazione intelligente / Smart lighting:
DALI su richiesta / DALI on request

MATERIALI / MATERIALS

Corpo / Body:
acciaio AISI 316L micropallinato con finitura sabbata
micro-shot peened stainless steel AISI 316L
with sanded finish

Gruppo ottico / Optical unit:
lente TIR (Total Internal Reflection) realizzata in Ultra-Clear LSR (Liquid Silicone Rubber)
TIR (Total Internal Reflection) lense made from Ultra-Clear LSR (Liquid Silicone Rubber)

Finitura / Finish:
AISI 316L con finitura sabbata e micropallinata con sfere di vetro / AISI 316L stainless steel with sandblasted and micro-shot glass-sphere peened finish

TEMPERATURA COLORE COLOUR TEMPERATURE

-  3000 K
-  4000 K

COLORI / COLOURS

-  INOX AISI 316L

CARATTERISTICHE / FEATURES

Peso massimo / Max weight:
1 kg

Alimentazione elettronica / Electronic power supply:
esterna, da ordinare separatamente
external, to be ordered separately

Precablaggio / Pre-wiring:
incluso / included

Fissaggio / Fastening:
controcassa in materiale plastico da murare a pavimento (versione carrabile), con piastra in acciaio per fissaggio a terra o pavimento (versione calpestabile)
with recessed housing in plastic material to be buried in the floor (drive over version); with steel plate for ground or floor mounting (walk over version)

Installazione / Installation:
terra / ground





LOHJA
Finland

NERVI
Italy




OTTICHE / OPTICS


AS-D 180° Asymmetric Diffused Beam



RS-D 360° Rotosymmetric Diffused Beam

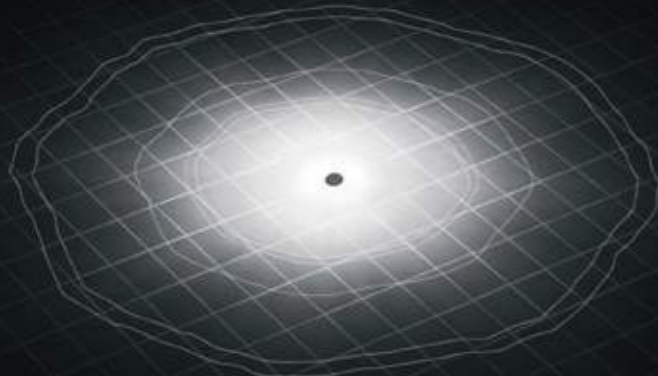


Grace




ACCESSORI / ACCESSORIES


06GC901B0
B129 - Controcassa carrabile
 Drive over recessed housing

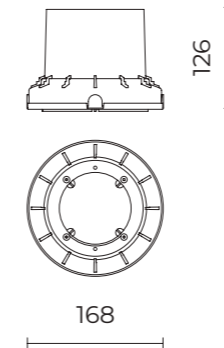


06GC902X0
B165 - Connettore 2 IP68 2-pole
 connector IP68

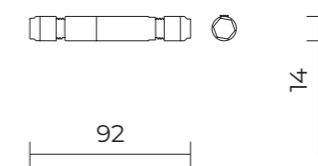


06AK958X0
M3 - Kit entra-esci cavo 2x0,75
 Kit in-out cable 2x0,75

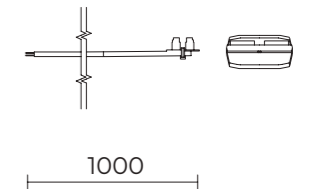

06CH903X0
B147 - Driver elettronico
10W 24V IP67
 Electronic driver
 10W 24V IP67



06CH904X0
B148 - Driver elettronico
60W 24V IP67
 Electronic driver
 60W 24V IP67

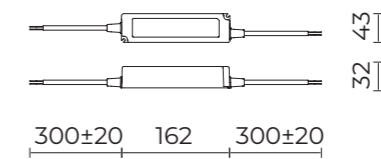

06LL914AB0
Driver elettronico DALI
150W 24V IP67
 DALI electronic driver
 150W 24V IP67



Metalmek Lighting B.V

Canadabaan7-d
5388 RT Nistelrode
Tel. 0412-614033

info@metalmek.nl
www.metalmek.nl

Metalmek

Cariboni
group

 **LIVAL**

NORDIC  **ALUMINIUM**