





ALERT

# ALERT

\*DALI compatible

| Input Power | LED-Module<br>*Citizen 6-Gen                                                                     | Colour Consistency | Installation Type               | Material                                  | Warranty                 | Beam Angles                                        | Luminaire Color                                                       |
|-------------|--------------------------------------------------------------------------------------------------|--------------------|---------------------------------|-------------------------------------------|--------------------------|----------------------------------------------------|-----------------------------------------------------------------------|
| 220 – 240V  | CRI 80+<br>3000K, 4000K, 5000K<br><br>CRI 90+<br>2700K B.BBL, 3000K B.BBL,<br>3500K B.BBL, 4000K | 2-Step<br>MacAdam  | NoA & Most<br>3-phase<br>Tracks | Powder<br>Painted<br>Die-Cast<br>Aluminum | 50 000h<br>Or<br>5 Years | 1206 COB:<br>S 15°<br>NFL 20°<br>FL 30°<br>WFL 50° | White (RAL 9016)<br><br>Silver (Ca. RAL 9006)<br><br>Black (RAL 9005) |

| Output Current /<br>Module Wattage /<br>System Wattage: | LED Module: Citizen CLU038-1206 6-Gen – COB luminous flux: |                   |                   |                                |                                | Power: 300mA – 1050mA          |                   |
|---------------------------------------------------------|------------------------------------------------------------|-------------------|-------------------|--------------------------------|--------------------------------|--------------------------------|-------------------|
|                                                         | CRI 80+<br>3 000K                                          | CRI 80+<br>4 000K | CRI 80+<br>5 000K | CRI 90+<br>2 700K<br>Below BBL | CRI 90+<br>3 000K<br>Below BBL | CRI 90+<br>3 500K<br>Below BBL | CRI 90+<br>4 000K |
|                                                         | 450mA / 15W / 17W                                          | 2 475Lm           | 2 550Lm           | 2 575Lm                        | 1 950Lm                        | 2 025Lm                        | 2 150Lm           |
|                                                         | 900mA / 32W / 35W                                          | 4 425Lm           | 4 525Lm           | 4 575Lm                        | 3 450Lm                        | 3 600Lm                        | 3 850Lm           |
| 1050mA / 38W / 42W                                      | 4 925Lm                                                    | 5 050Lm           | 5 125Lm           | 3 850Lm                        | 4 000Lm                        | 4 075Lm                        | 4 300Lm           |

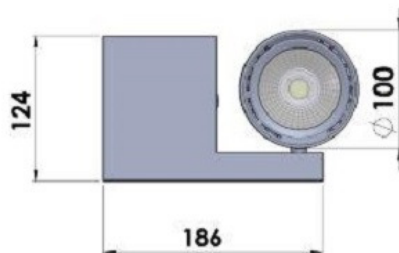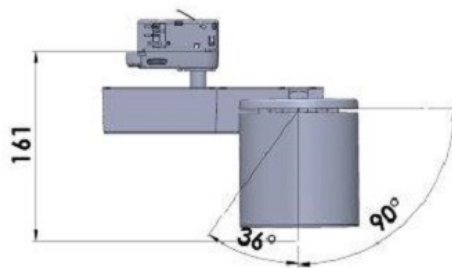

IP20

LED Design | Made In Finland

**LIVAL**

## **Metalmek Lighting B.V**

Canadabaan7-d  
5388 RT Nistelrode  
Tel. 0412-614033  
Fax 0412-613461

[info@metalmek.nl](mailto:info@metalmek.nl)  
[www.metalmek.nl](http://www.metalmek.nl)

