



# GA-016 BING

# GA-016 BING

Input Power	LED-Module *Citizen Ver. 6	Color Consistency	Installation Type	Material	Warranty	Beam Angles	Luminaire Color
220 – 240V	CRI 80+ 3000K, 4000K, 5000K  CRI 90+ 2700K B.BBL, 3000K B.BBL, 3500K B.BBL, 4000K	2-Step MacAdam	Nordic Aluminium 3-Phase Tracks	Powder Painted Die-Cast Aluminum	50 000h Or 5 Years	1206 COB: S 15° NFL 21° FL 32° WFL 46°	White (RAL 9016)  Silver (Ca. RAL 9006)  Black (RAL 9005)

LED Module: Citizen CLU038-1206 Ver. 6 – COB luminous flux:

Output Current /  
Module Wattage /  
System Wattage:


650mA / 23W / 25W

700mA / 24W / 27W

750mA / 26W / 29W

CRI 80+ 3 000K	CRI 80+ 4 000K	CRI 80+ 5 000K	CRI 90+ 2 700K Below BBL	CRI 90+ 3 000K Below BBL	CRI 90+ 3 500K Below BBL	CRI 90+ 4 000K
3 350Lm	3 450Lm	3 475Lm	2 625Lm	2 725Lm	2 750Lm	2 925Lm
3 450Lm	3 550Lm	3 600Lm	2 700Lm	2 800Lm	2 850Lm	3 000Lm
3 650Lm	3 750Lm	3 800Lm	2 825Lm	2 925Lm	2 975Lm	3 150Lm

## Technical Dimensions:

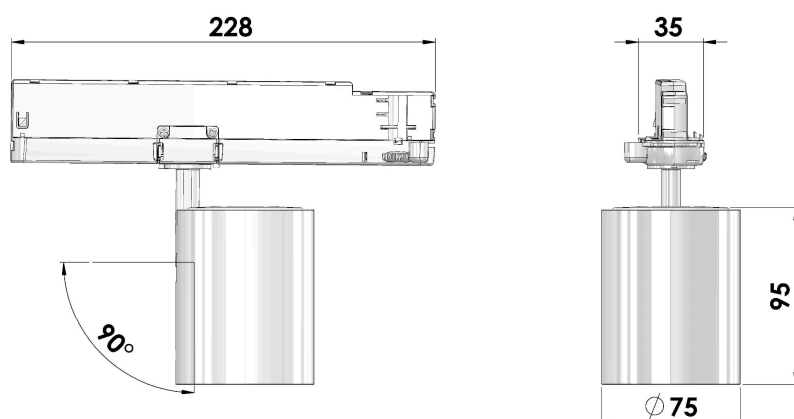

IP20

LED Design | Made In Finland

**LIVAL**