



Up to 7000lm

MacAdam 2-steps



LED - Meteor

- Optimal Performance
- High Output and Efficacy

General parameters:

Input Voltage range	Output Current range	Color Consistency	Installation Type	Material	Surface finish	Luminaire color	Warranty	IP-rating	Electrical protection
110-130VAC, 220-240VAC	300-1400mA	<i>MacAdam 2-steps</i>	Recessed with springs	Die-cast aluminium	Powder-coating	White (RAL 9016) Black (RAL 9005)	50 000h	20	Class-1

Optical performance and variations:

- COB: Citizen CLU038-1206 6Gen

Output Current / Module Wattage / Luminaire Wattage:	LED Module: Citizen CLU038-1206 6Gen – COB luminous flux:						
	CRI 80+ 3 000K	CRI 80+ 4 000K	CRI 80+ 5 000K	CRI 90+ 2 700K Below BBL	CRI 90+ 3 000K Below BBL	CRI 90+ 3 500K Below BBL	CRI 90+ 4 000K
650mA / 23W / 25W	3 450Lm	3 525Lm	3 575Lm	2 700Lm	2 800Lm	2 850Lm	3000Lm
900mA / 33W / 35W	4 450Lm	4 575Lm	4 625Lm	3 500Lm	3 625Lm	3 675Lm	3 875Lm
1050mA / 39W / 43W	5 025Lm	5 150Lm	5 200Lm	3 925Lm	4 075Lm	4 150Lm	4 350Lm

- Options for Beam-angle: 10-, 24-, 30- and 50-Degrees

- COB: Citizen CLU048-1212 6Gen

Output Current / Module Wattage / Luminaire Wattage:	LED Module: Citizen CLU048-1212 6Gen – COB luminous flux:						
	CRI 80+ 3 000K	CRI 80+ 4 000K	CRI 80+ 5 000K	CRI 90+ 2 700K Below BBL	CRI 90+ 3 000K Below BBL	CRI 90+ 3 500K Below BBL	CRI 90+ 4 000K
650mA / 22W / 25W	3 700Lm	3 800Lm	3 825Lm	2 900Lm	3 000Lm	3 050Lm	3 225Lm
1050mA / 36W / 40W	5 625Lm	5 775Lm	5 850Lm	4 400Lm	4 575Lm	4 650Lm	4 900Lm
1400mA / 49W / 55W	7 050Lm	7 225Lm	7 325Lm	5 525Lm	5 750Lm	5 825Lm	6 125Lm

- Options for Beam-angle: 20-, 40- and 60-Degrees


Features:

- Easy installation
- General purpose lighting
- Smooth and elegant design

Ordering information:

- Please contact Lival sales for product codes and further information

Dimensions and mechanical data:

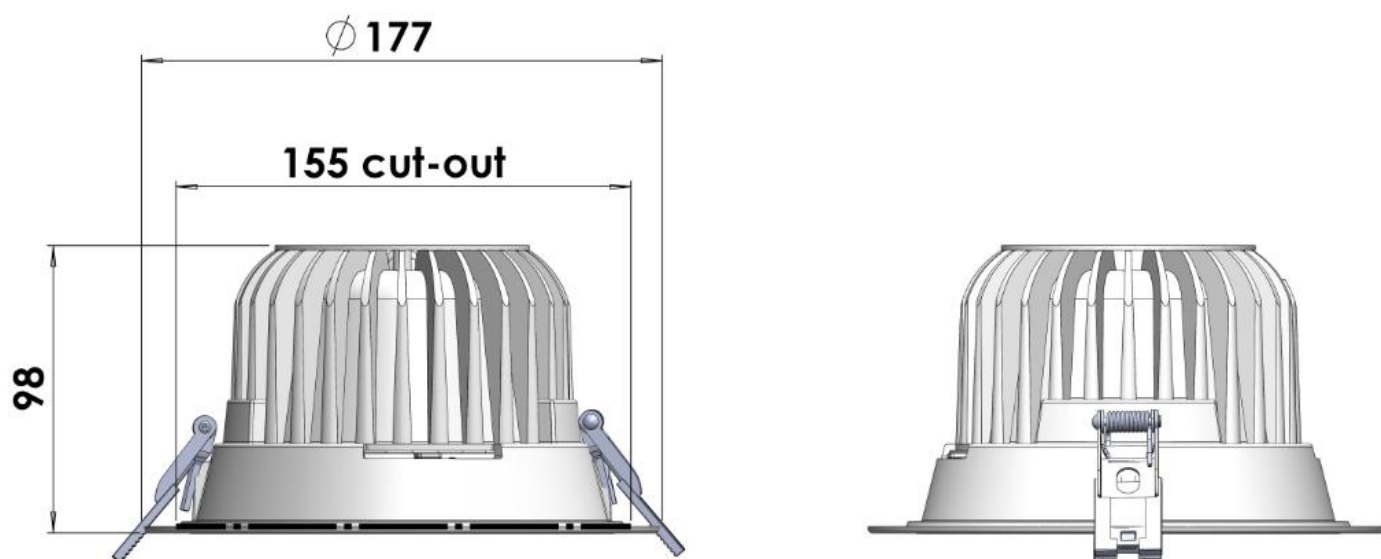

Metalmek Lighting B.V

Canadabaan7-d
5388 RT Nistelrode
Tel. 0412-614033
Fax 0412-613461

info@metalmek.nl
www.metalmek.nl

