

Nobile Italia

Questione di luce.
Light matters.



TRIS

Plafoniera LED tonda e quadrata IP20 per installazione a plafone e a parete.

LED 2835.

Life time 30.000h (rendimento 70%).

Selettore per cambiare la temperatura di colore:
3000K - 4000K - 5000K

Corpo in policarbonato bianco e diffusore opale.

Alimentatore 220-240V 50/60Hz incluso.

IP20 round and square LED fitting for ceiling and wall-mounted installation

2835 LED

Life time 30.000h (70% lumen maintenance).


*Switch to change color temperature:
3000K - 4000K - 5000K*

White polycarbonate body, opal diffuser.


220-240V 50/60Hz power supply included.




PLDR22

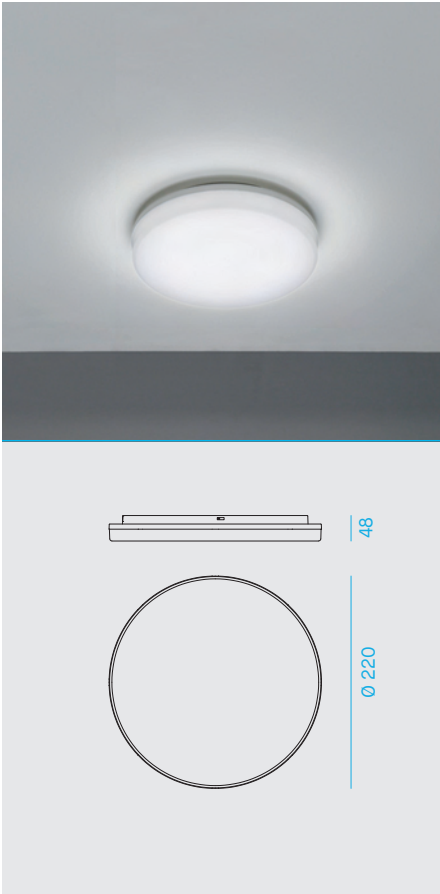

PLDR33



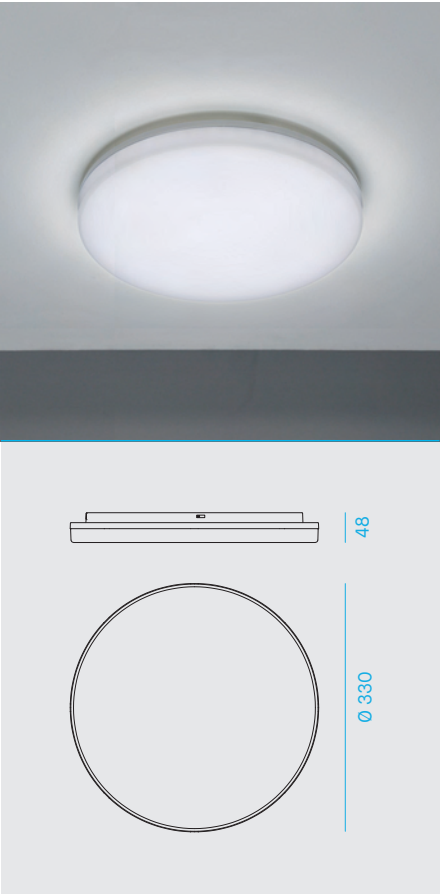


PLDR40

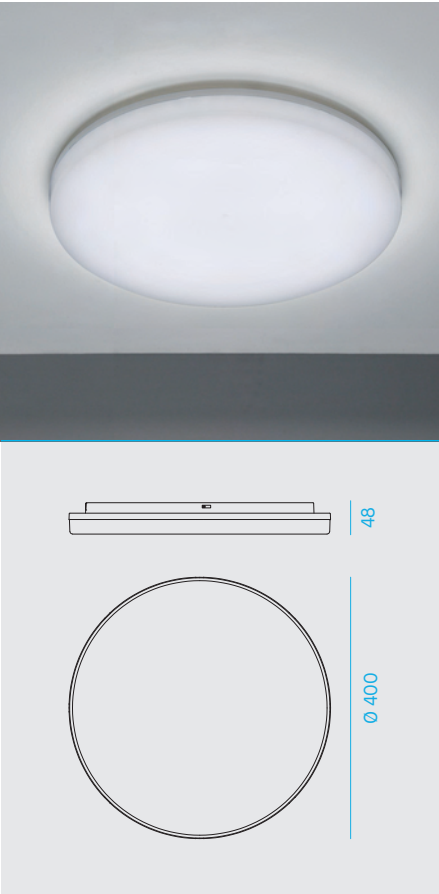

Caratteristiche generali della linea di prodotto — General features of the product line

CRI 80	110°	DRIVER INCLUDED	GRF 0	UGR <28	IK08	IP20	CE	F		A++ A+ A
-----------	------	--------------------	----------	------------	------	------	----	---	--	----------

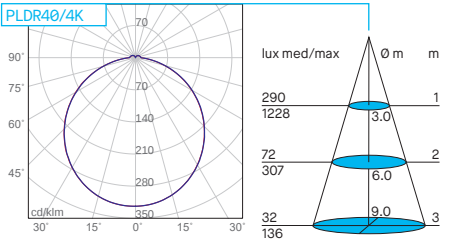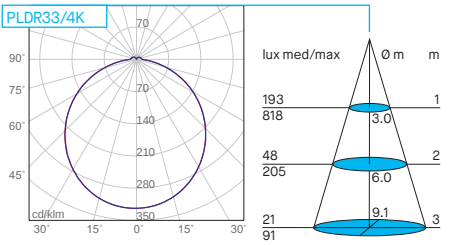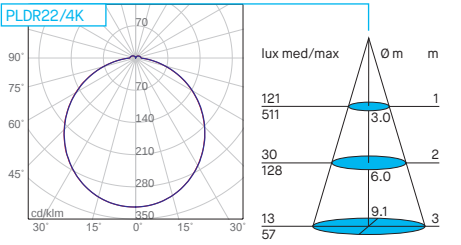

* Fotometrie eseguite con temperatura di colore 4000K

* Photometric tests at 4000K CCT

PLDR22

Code	Nominal/lm	Real/lm	System/W	CCT*	Beam	Driver
PLDR22	1650	1579	15	3000K- 4000K -5000K	110°	on-off

PLDR33

Code	Nominal/lm	Real/lm	System/W	CCT*	Beam	Driver
PLDR33	2750	2527	24	3000K- 4000K -5000K	110°	on-off


PLDR40

Code	Nominal/lm	Real/lm	System/W	CCT*	Beam	Driver
PLDR40	4200	3791	36	3000K- 4000K -5000K	110°	on-off


Selettore per cambiare la temperatura di colore: 3000K - 4000K - 5000K
Switch to change color temperature: 3000K - 4000K - 5000K




PLDS22

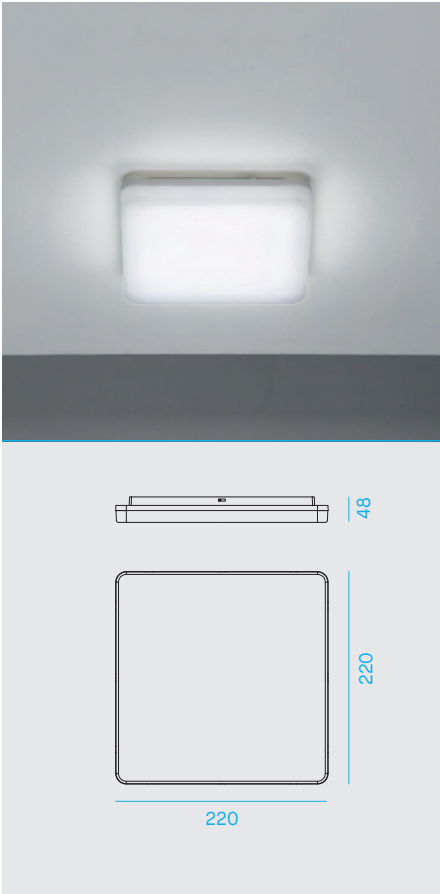

PLDS33



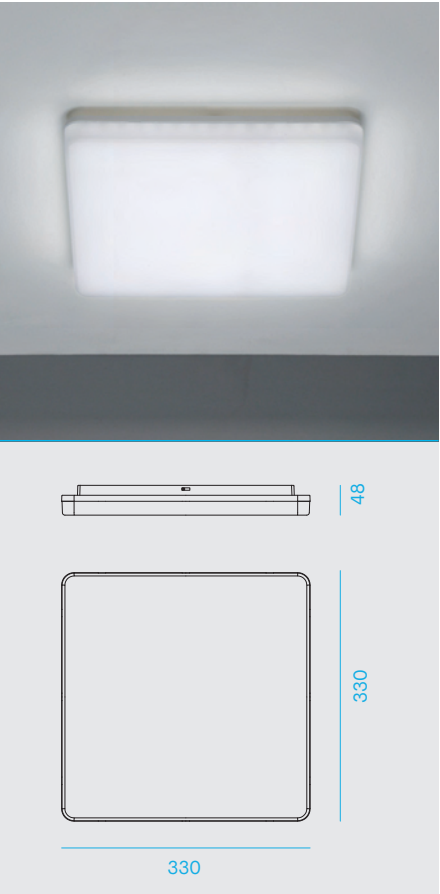


PLDS40

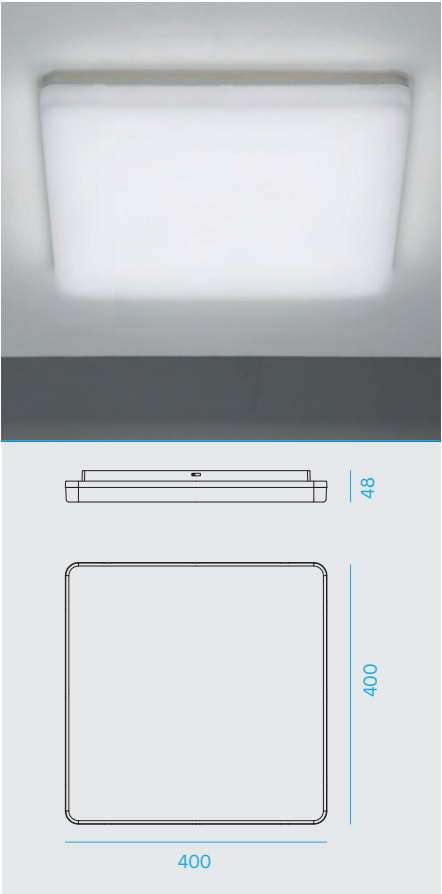

Caratteristiche generali della linea di prodotto — General features of the product line

CRI 80	110°	DRIVER INCLUDED	GRF 0	UGR <28	IK08	IP20	CE	F		A++ A+ A
-----------	------	--------------------	----------	------------	------	------	----	---	--	----------

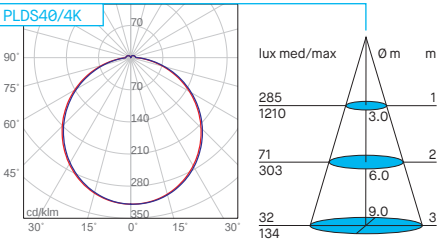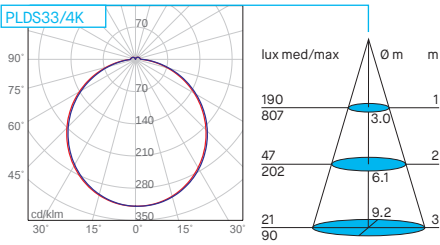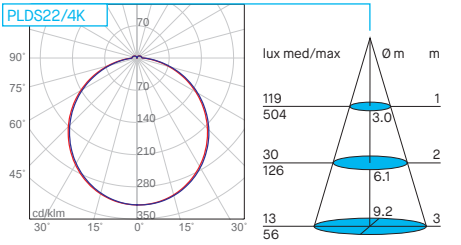

* Fotometrie eseguite con temperatura di colore 4000K

* Photometric tests at 4000K CCT

PLDS22

Code	Nominal/lm	Real/lm	System/W	CCT*	Beam	Driver
PLDS22	1650	1579	15	3000K- 4000K -5000K	110°	on-off


PLDS33

Code	Nominal/lm	Real/lm	System/W	CCT*	Beam	Driver
PLDS33	2750	2527	24	3000K- 4000K -5000K	110°	on-off

PLDS40

Code	Nominal/lm	Real/lm	System/W	CCT*	Beam	Driver
PLDS40	4200	3791	36	3000K- 4000K -5000K	110°	on-off

Selettore per cambiare la temperatura di colore: 3000K - 4000K - 5000K
Switch to change color temperature: 3000K - 4000K - 5000K

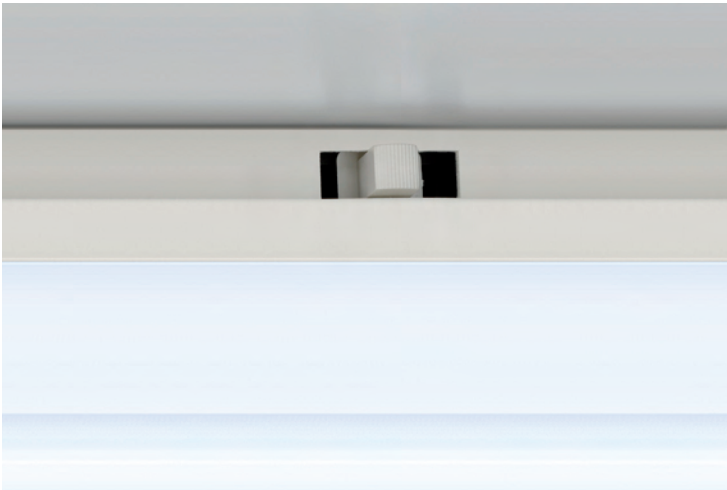

Metalmek Lighting B.V

Canadabaan7-d
5388 RT Nistelrode
Tel. 0412-614033
Fax 0412-613461

info@metalmek.nl
www.metalmek.nl

Metalmek

Cariboni
group

GVA
LIGHTING

LIVAL

NORDIC  **ALUMINIUM**