


Nobile Italia

Questione di luce.
Light matters.



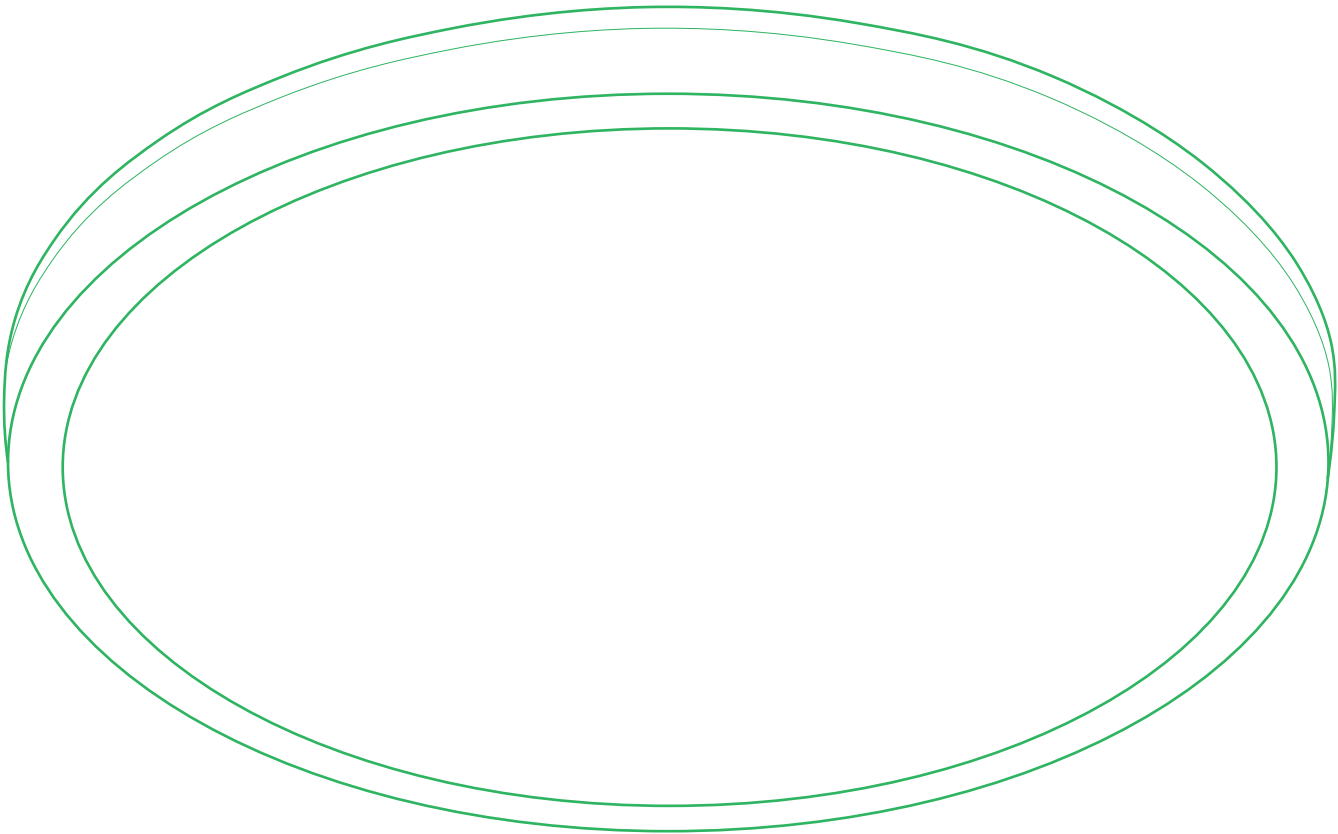

→ Plafoniera LED tonda e quadra IP65 per installazione a plafone e a parete.

LED 2835.

Life time 30.000h (rendimento 70%).

Corpo e anello in policarbonato bianco e diffusore opale.

Alimentatore 220-240V 50/60Hz incluso.

IP65 round and square LED fitting for ceiling and wall-mounted installation.

2835 LED


Life time 30.000h (70% lumen maintenance).

White polycarbonate body and ring, opal diffuser.


220-240V 50/60Hz power supply included.




PLIR28

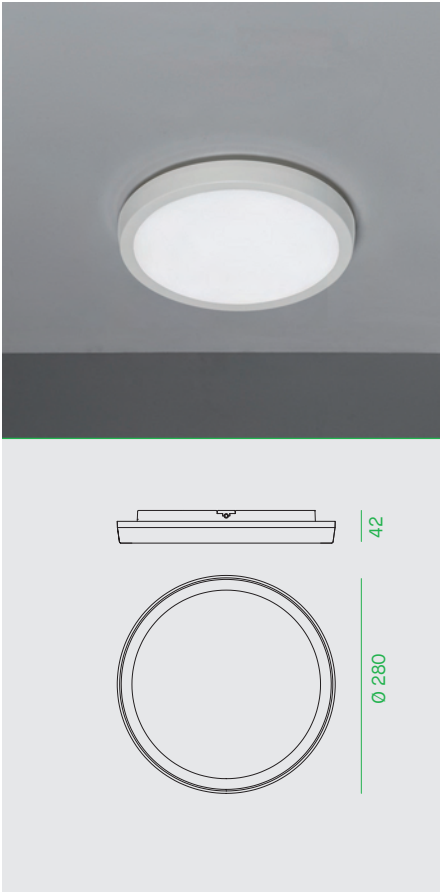

PLIR33



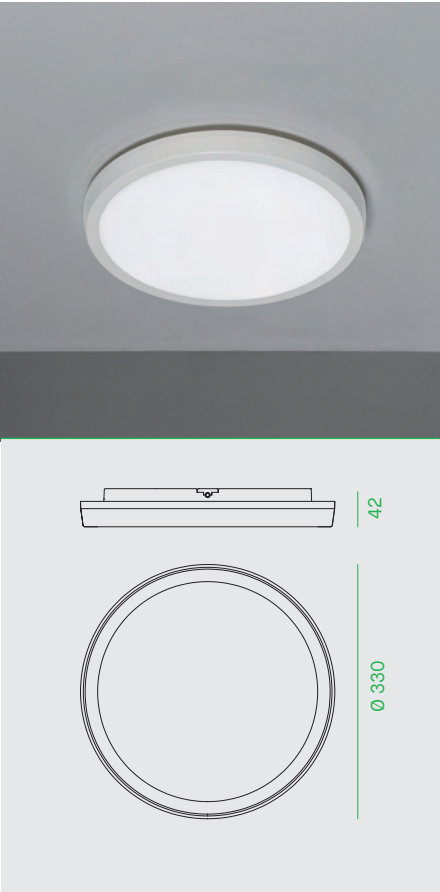


PLIR40

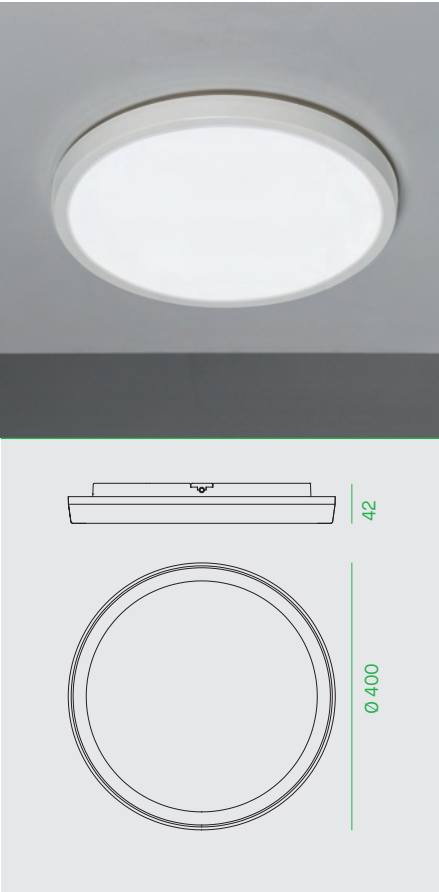

Caratteristiche generali della linea di prodotto — General features of the product line

CRI 80	110°	DRIVER INCLUDED	GRF 0	UGR <28	IK08	IP65	CE	F		A++ A+ A
-----------	------	--------------------	----------	------------	------	------	----	---	--	----------

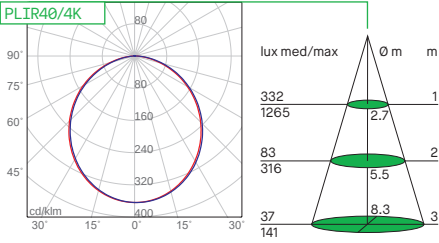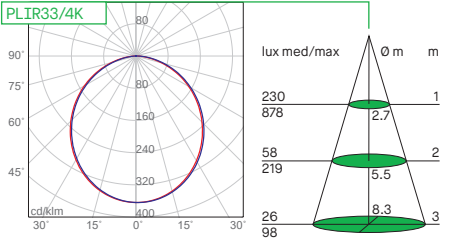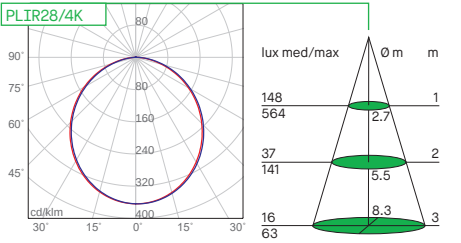

PLIR28

Code	Nominal/lm	Real/lm	System/W	CCT	Beam	Driver
PLIR28/3K	1650	1550	18	3000K	110°	on-off
PLIR28/4K	1650	1550	18	4000K	110°	on-off

PLIR33

Code	Nominal/lm	Real/lm	System/W	CCT	Beam	Driver
PLIR33/3K	2750	2412	24	3000K	110°	on-off
PLIR33/4K	2750	2412	24	4000K	110°	on-off

PLIR40

Code	Nominal/lm	Real/lm	System/W	CCT	Beam	Driver
PLIR40/3K	4200	3476	36	3000K	110°	on-off
PLIR40/4K	4200	3476	36	4000K	110°	on-off



Anello nero - Black frame




Anello grigio - Grey frame

Accessori su richiesta – Accessories upon request

Code	Descrizione	Description
ANELLO/PLIR28/B	Anello rotondo nero Ø280mm	Black round frame Ø280mm
ANELLO/PLIR28/G	Anello rotondo grigio Ø280mm	Grey round frame Ø280mm
ANELLO/PLIR33/B	Anello rotondo nero Ø330mm	Black round frame Ø330mm
ANELLO/PLIR33/G	Anello rotondo grigio Ø330mm	Grey round frame Ø330mm
ANELLO/PLIR40/B	Anello rotondo nero Ø400mm	Black round frame Ø400mm
ANELLO/PLIR40/G	Anello rotondo grigio Ø400mm	Grey round frame Ø400mm


PLIS28

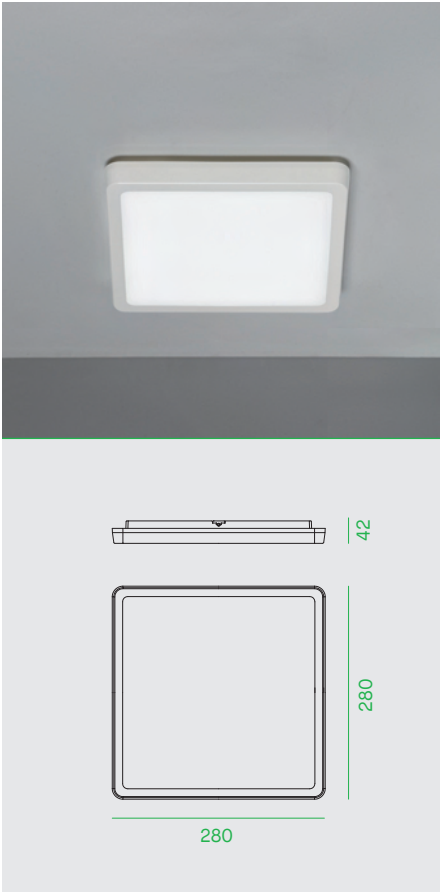

PLIS33






PLIS40

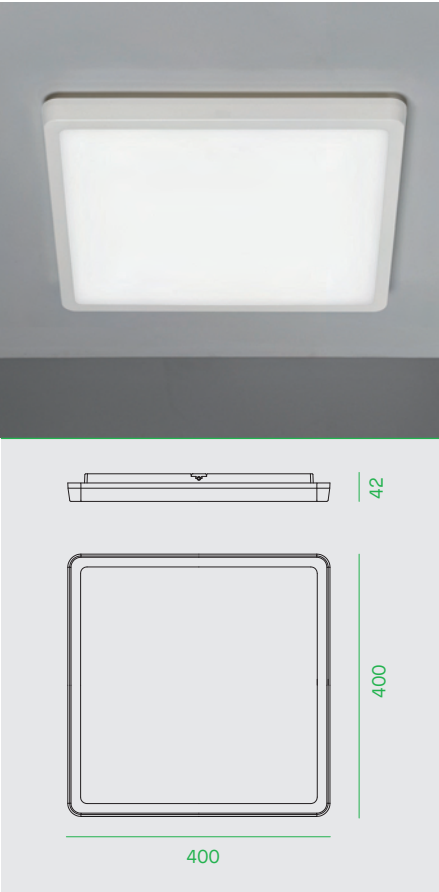

Caratteristiche generali della linea di prodotto — General features of the product line

CRI 80	110°	DRIVER INCLUDED	GRF 0	UGR <28	IK08	IP65	CE	F		A++ A+ A
-----------	------	--------------------	----------	------------	------	------	----	---	--	----------

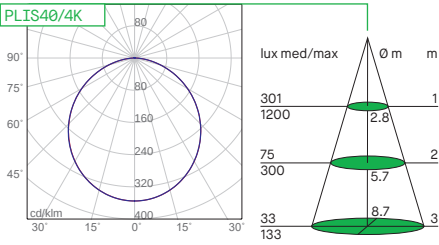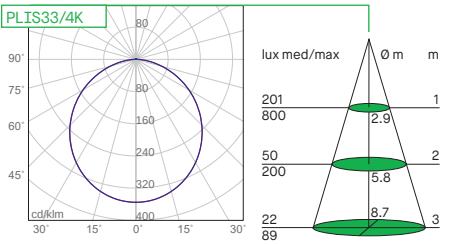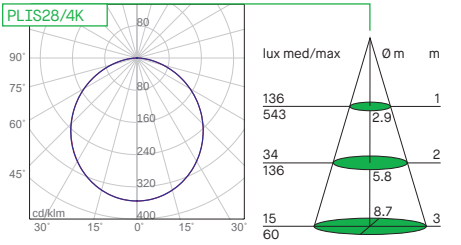

PLIS28

Code	Nominal/lm	Real/lm	System/W	CCT	Beam	Driver
PLIS28/3K	1650	1530	18	3000K	110°	on-off
PLIS28/4K	1650	1530	18	4000K	110°	on-off

PLIS33

Code	Nominal/lm	Real/lm	System/W	CCT	Beam	Driver
PLIS33/3K	2750	2252	24	3000K	110°	on-off
PLIS33/4K	2750	2252	24	4000K	110°	on-off

PLIS40

Code	Nominal/lm	Real/lm	System/W	CCT	Beam	Driver
PLIS40/3K	4200	3379	36	3000K	110°	on-off
PLIS40/4K	4200	3379	36	4000K	110°	on-off



Anello nero - Black frame



Anello grigio - Grey frame

Accessori su richiesta – Accessories upon request

Code	Descrizione	Description
ANELLO/PLIS28/B	Anello quadrato nero Ø280mm	Black square frame Ø280mm
ANELLO/PLIS28/G	Anello quadrato grigio Ø280mm	Grey square frame Ø280mm
ANELLO/PLIS33/B	Anello quadrato nero Ø330mm	Black square frame Ø330mm
ANELLO/PLIS33/G	Anello quadrato grigio Ø330mm	Grey square frame Ø330mm
ANELLO/PLIS40/B	Anello quadrato nero Ø400mm	Black square frame Ø400mm
ANELLO/PLIS40/G	Anello quadrato grigio Ø400mm	Grey square frame Ø400mm

Metalmek Lighting B.V

Canadabaan7-d
5388 RT Nistelrode
Tel. 0412-614033
Fax 0412-613461

info@metalmek.nl
www.metalmek.nl

Metalmek

Cariboni
group

GVA
LIGHTING

LIVAL

NORDIC  **ALUMINIUM**