



MINI PRIORITY

- Compact design

MINI PRIORITY

Input Power	LED-Module *Citizen 6-Gen	Color Consistency	Installation Type	Material	Warranty	Beam Angles	Luminaire Color
220 – 240V	CRI 80+ 3000K, 4000K, 5000K CRI 90+ 2700K B.BBL, 3000K B.BBL, 3500K B.BBL, 4000K	2-Step MacAdam	Nordic Aluminium 3- & 1-Phase Tracs	Powder Painted Die-Cast Aluminum	50 000h	1206 COB: S 15° NFL 20° FL 30° WFL 50°	White (RAL 9016) Silver (Ca. RAL 9006) Black (RAL 9005)

Output Current /
Module Wattage /
System Wattage:

450mA / 15W / 17W


650mA / 23W / 25W

900mA / 32W / 35W

LED Module: Citizen CLU038-1206 6-Gen – COB luminous flux:

Power: 300mA – 900mA

CRI 80+ 3 000K	CRI 80+ 4 000K	CRI 80+ 5 000K	CRI 90+ 2 700K Below BBL	CRI 90+ 3 000K Below BBL	CRI 90+ 3 500K Below BBL	CRI 90+ 4 000K
2 425Lm	2 500Lm	2 525Lm	1 900Lm	1 975Lm	2 000Lm	2 125Lm
3 350Lm	3 450Lm	3 475Lm	2 625Lm	2 725Lm	2 750Lm	2 925Lm
4 300Lm	4 425Lm	4 475Lm	3 375Lm	3 500Lm	3 550Lm	3 750Lm

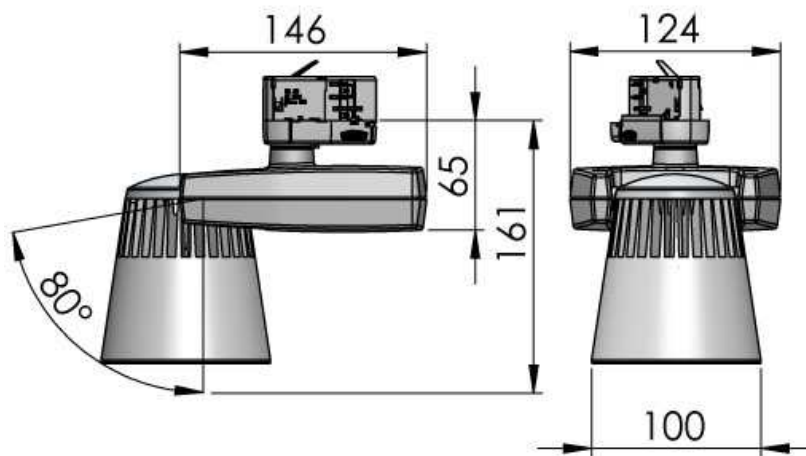

IP20

LED Design | Made In Finland

LIVAL