




REFORM CYLINDER

REFORM CYLINDER

Input Power	LED Module *Citizen 6-Gen	Colour Consistency	Installation Type	Material	Beam Angle Options		Luminaire Color
220 – 240V	CRI 80+ 3000K, 4000K, 5000K CRI 90+ 2700K B.BBL, 3000K B.BBL, 3500K B.BBL, 4000K	2-Step MacAdam	NoA & Most 3-phase Tracks	Powder Painted Die-Cast Aluminum	1206 COB S 10° NFL 24° FL 30° WFL 50°	1212 COB S 20° NFL - FL 40° WFL 60°	White (RAL 9016) Silver (Ca. RAL 9006) Black (RAL 9005)

Output Current / Module Wattage / System Wattage:	LED Module: Citizen CLU038-1206 6-Gen – COB luminous flux:					Power: 300mA – 850mA	
	CRI 80+ 3 000K	CRI 80+ 4 000K	CRI 80+ 5 000K	CRI 90+ 2 700K Below BBL	CRI 90+ 3 000K Below BBL	CRI 90+ 3 500K Below BBL	CRI 90+ 4 000K
	700mA / 25W / 28W	3 675Lm	3 775Lm	3 800Lm	2 875Lm	2 975Lm	3 025Lm
	750mA / 27W / 29W	3 875Lm	3 975Lm	4 025Lm	3 025Lm	3 150Lm	3 200Lm
	800mA / 29W / 31W	4 050Lm	4 175Lm	4 225Lm	3 175Lm	3 300Lm	3 350Lm
	850mA / 31W / 33W	4 250Lm	4 375Lm	4 425Lm	3 325Lm	3 475Lm	3 525Lm

	LED Module: Citizen CLU048-1212 6-Gen – COB luminous flux:				Power: 300mA – 850mA		
	3 950Lm	4 050Lm	4 100Lm	3 075Lm	3 200Lm	3 250Lm	3 425Lm
	700mA / 23W / 26W	4 200Lm	4 300Lm	4 350Lm	3 275Lm	3 400Lm	3 450Lm
	750mA / 25W / 28W	4 450Lm	4 550Lm	4 625Lm	3 475Lm	3 625Lm	3 675Lm
	800mA / 27W / 30W	4 700Lm	4 825Lm	4 875Lm	3 675Lm	3 825Lm	3 875Lm
	850mA / 29W / 32W						4 075Lm

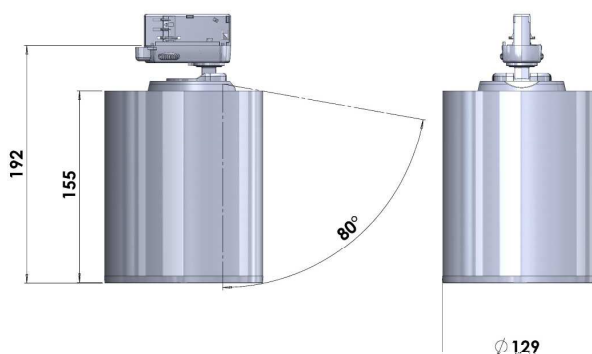

*COB efficacy –
Up to 170lm/W

IP20

LED Design | Made In Finland

LIVAL