

RESPECT SINGLE

* Ideal for general lighting retail applications



Input Power	LED-Module *TCI LM400/20R48	Installation Type	Material	Warranty	Diffuser Types	Luminaire Color
220 – 240V	CRI 80+ 3000K, 4000K	Nordic Aluminium 3-phase tracks	Powder Painted Extruded Aluminum / Polycarbonate	50 000h	Opal & Direct	White (RAL 9016)

Luminous flux:	
CRI 80+ 3 000K	CRI 80+ 4 000K
1 770Lm 500mA Module 12W System 15W	1 800Lm 500mA Module 12W System 15W



IP20

LED Design | Made In Finland



RESPECT DOUBLE

* Ideal for general lighting retail applications




Input Power	LED-Module *TCI LM415/44R96	Installation Type	Material	Warranty	Diffuser Types	Luminaire Color
220 – 240V	CRI 80+ 3000K, 4000K	Nordic Aluminium 3-phase tracks	Powder Painted Extruded Aluminum / Polycarbonate	50 000h	Opal, Direct & Asymmetric	White (RAL 9016)

Consumption & Luminous flux:


CRI 80+ 3 000K	CRI 80+ 4 000K
3 540Lm 500mA Module 23W System 27W	3 600Lm 500mA Module 23W System 27W

Luminaire dimensions:

Length: 470mm
Width: 56mm
Height: 43mm

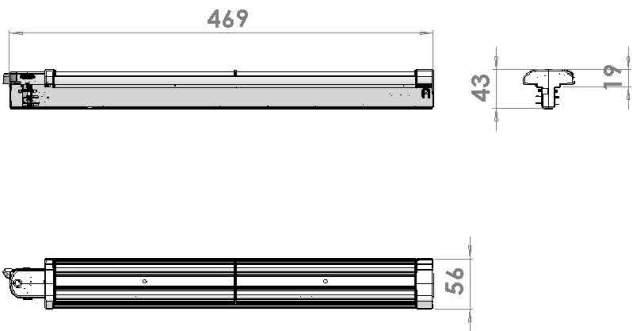

Light Intensity distribution: (Direct lens)

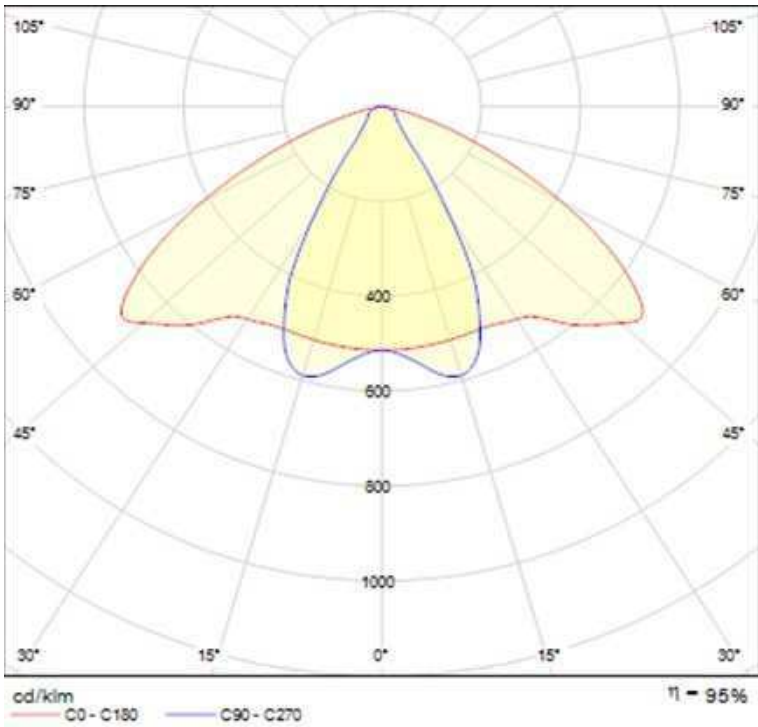

IP20

LED Design | Made In Finland



Metalmek Lighting B.V

Canadabaan7-d
5388 RT Nistelrode
Tel. 0412-614033
Fax 0412-613461

info@metalmek.nl
www.metalmek.nl

