


SECUR 812

- Multipurpose Pendant With High Performance

Input Power	LED-Module *Citizen 6-Gen	Color Consistency	Installation Type	Material	Beam Angles		Luminaire Color
220 – 240V	CRI 80+ 3000K, 4000K, 5000K	2-Step MacAdam	Suspended with power cable from the ceiling (3-5m)	Powder Painted Die-Cast Aluminum	S	15°	White (RAL 9016)
	NFL				20°	Silver (Ca. RAL 9006)	
	FL				30°		
	WFL				50°	Black (RAL 9005)	

Output Current / Module Wattage / System Wattage:	LED Module: Citizen CLU038-1206 6-Gen – COB luminous flux:					Power: 300mA – 900mA	
	CRI 80+ 3 000K	CRI 80+ 4 000K	CRI 80+ 5 000K	CRI 90+ 2 700K Below BBL	CRI 90+ 3 000K Below BBL	CRI 90+ 3 500K Below BBL	CRI 90+ 4 000K
	2 425Lm	2 500Lm	2 525Lm	1 900Lm	1 975Lm	2 000Lm	2 125Lm
	3 350Lm	3 450Lm	3 475Lm	2 625Lm	2 725Lm	2 750Lm	2 925Lm
	4 300Lm	4 425Lm	4 475Lm	3 375Lm	3 500Lm	3 550Lm	3 750Lm

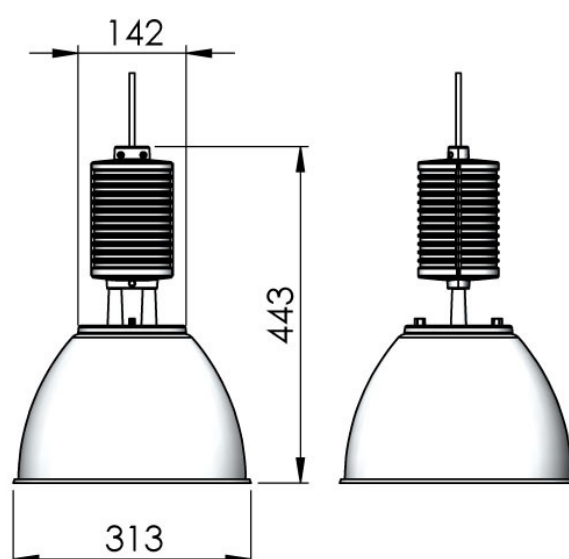

*Available with acrylic and aluminium shade

IP20

LED Design | Made In Finland

LIVAL

Metalmek Lighting B.V

Canadabaan7-d
5388 RT Nistelrode
Tel. 0412-614033
Fax 0412-613461

info@metalmek.nl
www.metalmek.nl

