


N3

TRAIL

TRAIL è la soluzione ideale per l'illuminazione lineare outdoor e indoor di tutti quei luoghi dove è necessaria qualità della luce, affidabilità ed efficienza energetica.

TRAIL is the ideal solution for indoor and outdoor linear lighting wherever light quality, reliability and energy efficiency are required.

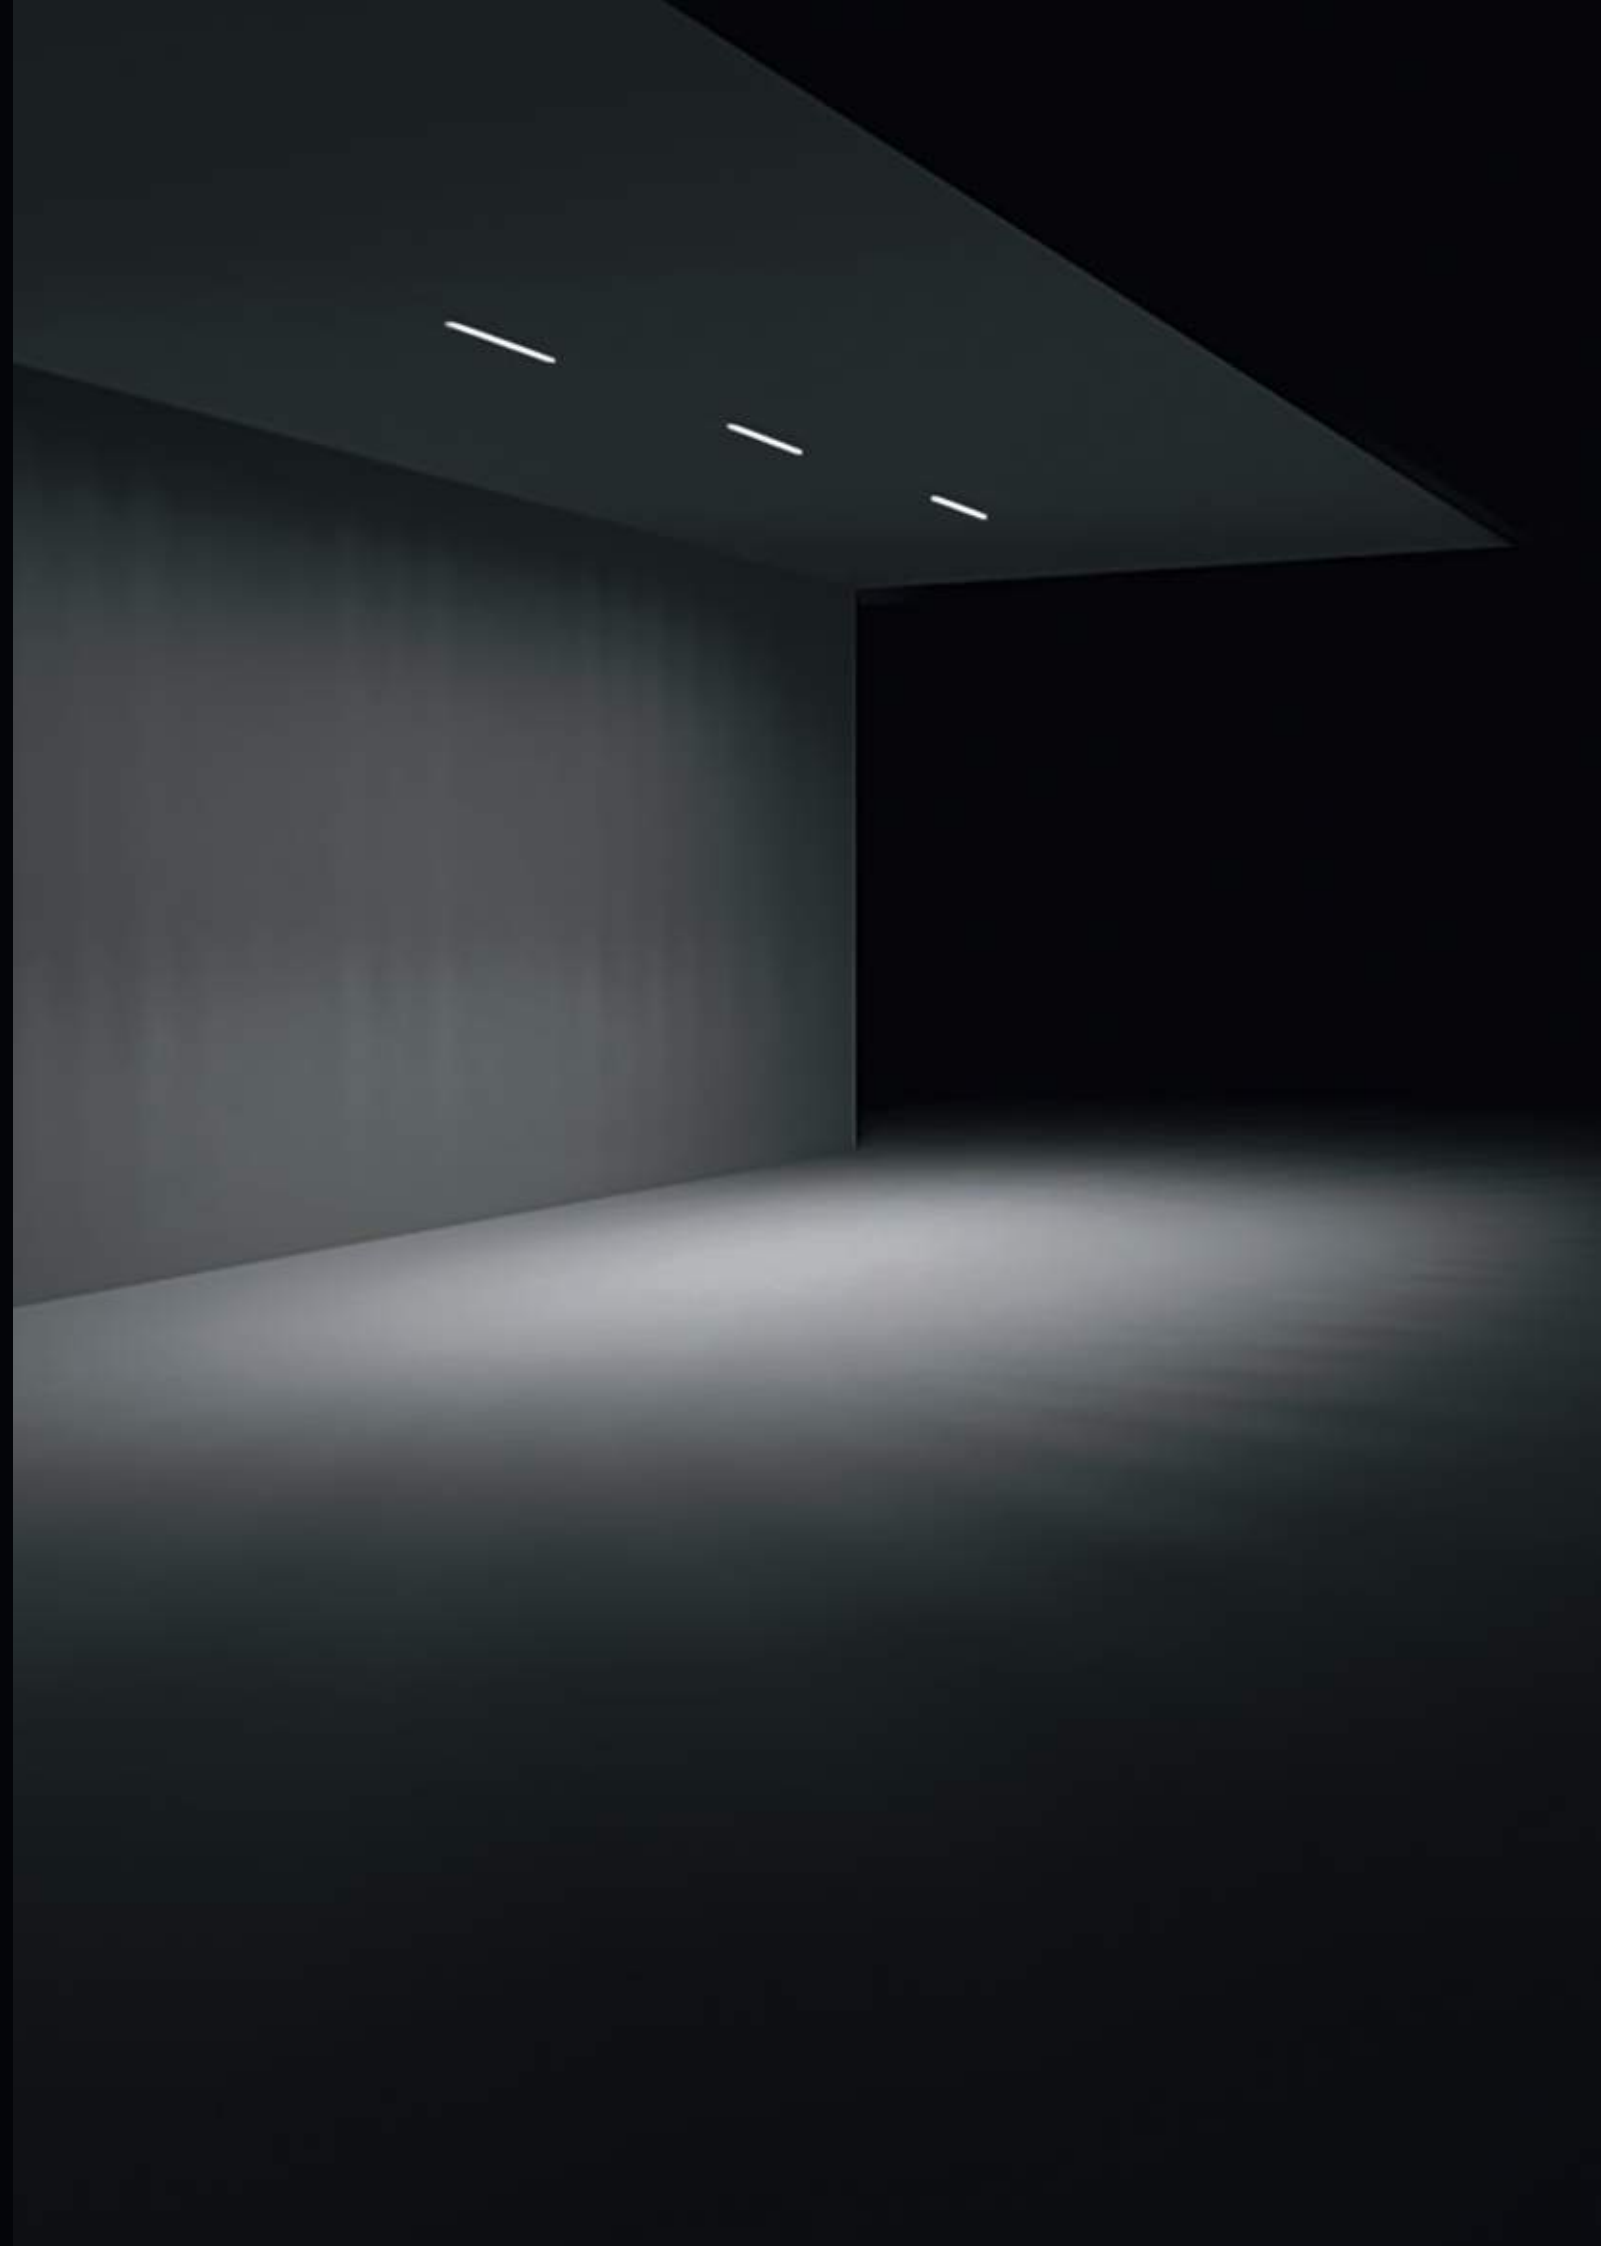



SPALATO
Croatia

OLBIA
Italy



**DATI PRESTAZIONALI / PERFORMANCE DATA**

Flusso apparecchio / Fitting flux:
795 - 7530 lm

Potenza apparecchio / Fitting power:
7,2 - 57,5 W

Indice di resa cromatica / Colour Rendering Index:
CRI ≥ 80, SDCM ≤ 3

Illuminazione intelligente / Smart lighting:
DALI su richiesta / DALI on request

MATERIALI / MATERIALS

Corpo / Body:
estruso in lega di alluminio anodizzato
extruded anodised aluminium alloy

Sistemi di fissaggio / Fitting system:
testate di chiusura e accessori di fissaggio in
pressofusione in lega di alluminio UNI EN AB 47100
(contenuto di rame < 1%) / closing heads and fastening
accessories made of die-cast aluminium alloy
UNI EN AB 47100 (copper content < 1%)

Schermo / Screen:
vetro piano temprato / tempered flat glass

Gruppo ottico / Optical unit:
lenti PMMA ad alta trasparenza
PMMA high transparent lenses

Finitura / Finish:
anodizzazione / anodization

**TEMPERATURA COLORE
COLOUR TEMPERATURE**

- 3000 K
- 4000 K

COLORI / COLOURS

- ALLUMINIO ANODIZZATO
NATURALE / NATURAL
ANODIZED ALUMINIUM

CARATTERISTICHE / FEATURES

Peso massimo / Max weight:
3 kg (650 mm), 6 kg (1250 mm), 10 kg (2500 mm)

Alimentazione elettronica / Electronic power supply:
remota, da ordinare separatamente
remote, to be ordered separately

Precablaggio / Pre-wiring:
prodotto pre-cablato con cavo e connettore
pre-wired product with cable and connector

Installazione / Installation:
incasso soffitto, soffitto, incasso calpestabile,
incasso parete, parete, linea continua
recessed ceiling, ceiling, walkable recessed,
wall recessed, wall, continuous line



OTTICHE / OPTICS

U-D 80° / 100° Diffused Beam



S 75° / 95° Ultra-Wide Beam





AS α=13° 30° / 75° Asymmetric Beam



Trail

Incasso calpestabile / Walk over recessed

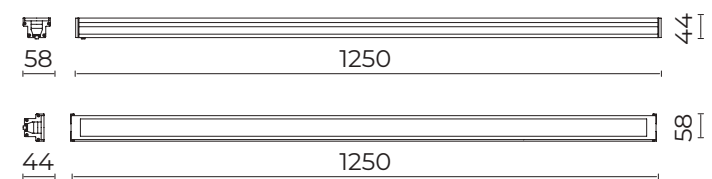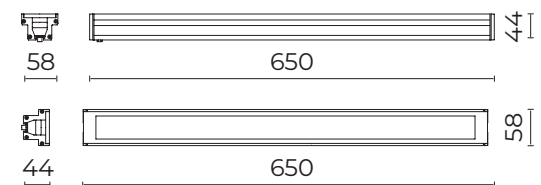




Trail


Incasso calpestabile / Walk over recessed

ACCESSORI / ACCESSORIES


06TR998J0
Controcassa Trail 650
Recessed housing Trail 650




06TR999J0
Controcassa Trail 1250
Recessed housing Trail 1250




06TA902X0
Driver elettronico 60W 24V IP66
Electronic driver 60W 24V IP66




06LL914AB0
Driver elettronico DALI 150W 24V IP67
DALI electronic driver 150W 24V IP67




06LL915AB0
Driver elettronico 240W 24V IP67
Electronic driver 240W 24V IP67



06AK958X0
M3 - Kit entra-esci cavo 2x0,75
Kit in-out cable 2x0,75

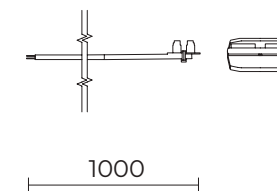

06GC902X0
B165 - Connettore 2 poli IP68
2-pole connector IP68



OTTICHE / OPTICS

U-D 80° / 100° Diffused Beam



S 75° / 95° Ultra-Wide Beam





AS α=13° 30° / 75° Asymmetric Beam




Trail

Incasso soffitto / Ceiling-recessed

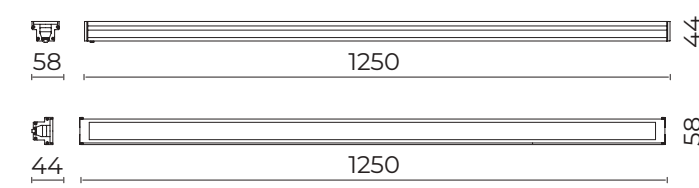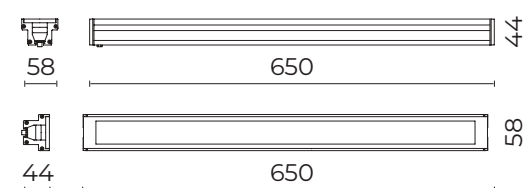


ACCESSORI / ACCESSORIES


06TR988A0
Kit incasso a plafone Trail 650
 Recessed ceiling kit Trail 650




06TR989A0
Kit incasso a plafone Trail 1250
 Recessed ceiling kit Trail 1250




06TA902X0
Driver elettronico 60W 24V IP66
 Electronic driver 60W 24V IP66



06LL914AB0
Driver elettronico DALI 150W 24V IP67
 DALI electronic driver 150W 24V IP67



06LL915AB0
Driver elettronico 240W 24V IP67
 Electronic driver 240W 24V IP67



Trail

OTTICHE / OPTICS

U-D 80° / 100° Diffused Beam



S 75° / 95° Ultra-Wide Beam







AS α=13° 30° / 75° Asymmetric Beam



Trail
Soffitto / Ceiling-mounted

Cariboni Group



Trail


Soffitto / Ceiling-mounted

ACCESSORI / ACCESSORIES

06TR986A0

Sistema sospensione Trail a soffitto driver remoto


Trail ceiling suspension system remote driver

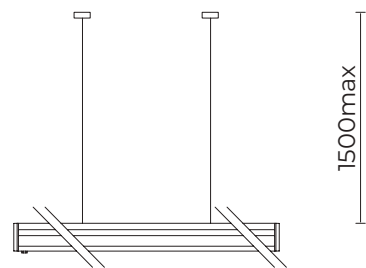

06TR987A0 - RAL9006

Staffe fissaggio Trail plafone driver remoto


Trail ceiling mounting brackets remote driver

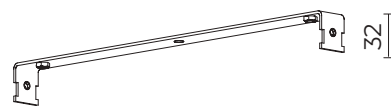

06LL914A0

Driver elettronico 150W 24V IP67


Electronic driver 150W 24V IP67



06GC902X0

B165 - Connettore 2 poli IP68


2-pole connector IP68



06OT988A0

Box cablato Trail per attacco a parete o a soffitto


IP65 CL II / Wired box Trail for wall or ceiling attachment IP65 CL II

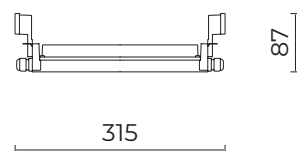

06TA902X0

Driver elettronico 60W 24V IP66


Electronic driver 60W 24V IP66



06LL915A0

Driver elettronico DALI 150W 24V IP67



DALI electronic driver 150W 24V IP67



06TR977X0

B220 - Connettore 4 vie IP68

4-way connector IP68

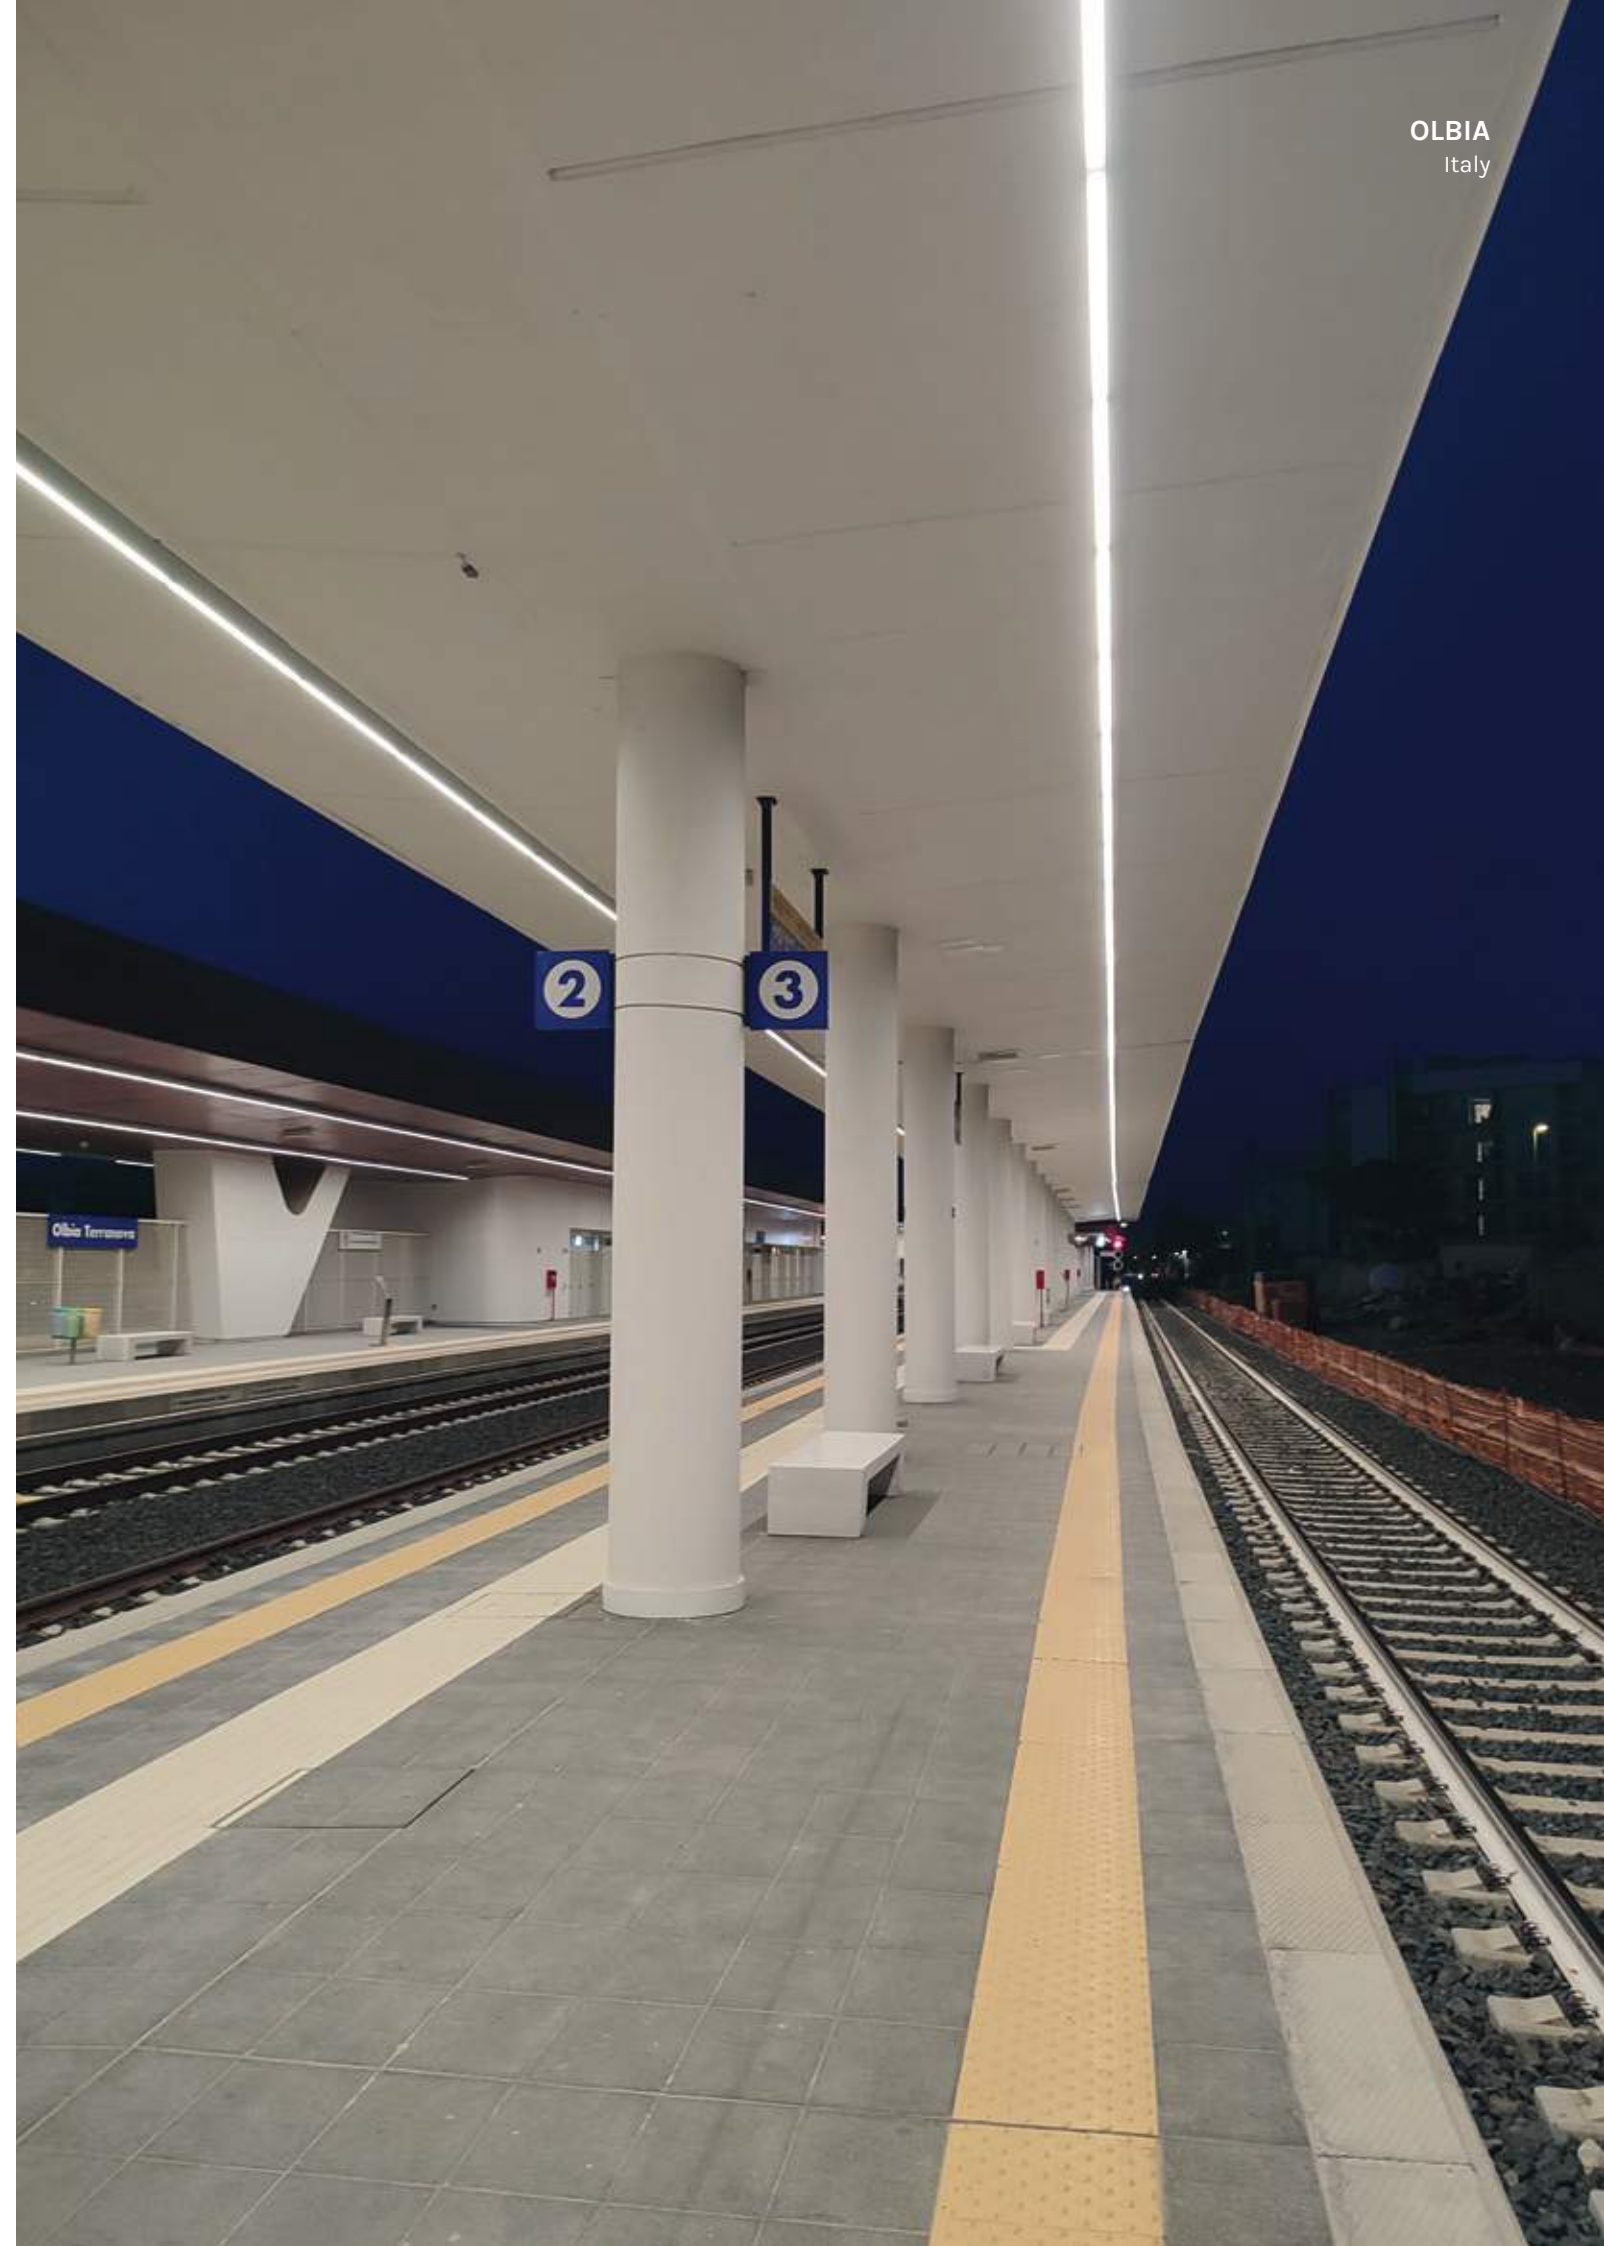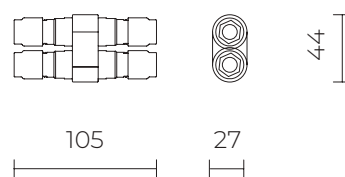

OTTICHE / OPTICS

U-D 80° / 100° Diffused Beam



S 75° / 95° Ultra-Wide Beam





AS $\alpha=13^\circ$ 30° / 75° Asymmetric Beam



Trail

Incasso parete / Wall-recessed

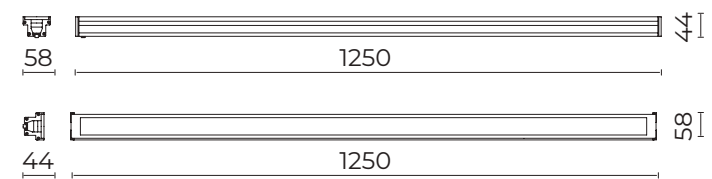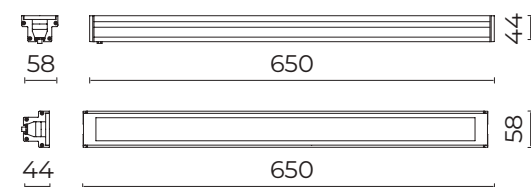


Trail

Trail

Incasso parete / Wall-recessed

ACCESSORI / ACCESSORIES


06TR998J0
Controcassa Trail 650
Recessed housing Trail 650




06TR999J0
Controcassa Trail 1250
Recessed housing Trail 1250




06TA902X0
Driver elettronico 60W 24V IP66
Electronic driver 60W 24V IP66




06LL914AB0
Driver elettronico DALI 150W 24V IP67
DALI electronic driver 150W 24V IP67





06LL915AB0
Driver elettronico 240W 24V IP67
Electronic driver 240W 24V IP67



06AK958X0
M3 - Kit entra-esca cavo 2x0,75
Kit in-out cable 2x0,75

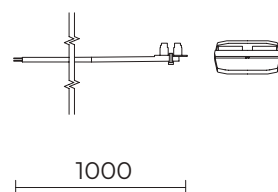

06GC902X0
B165 - Connettore 2 poli IP68
2-pole connector IP68

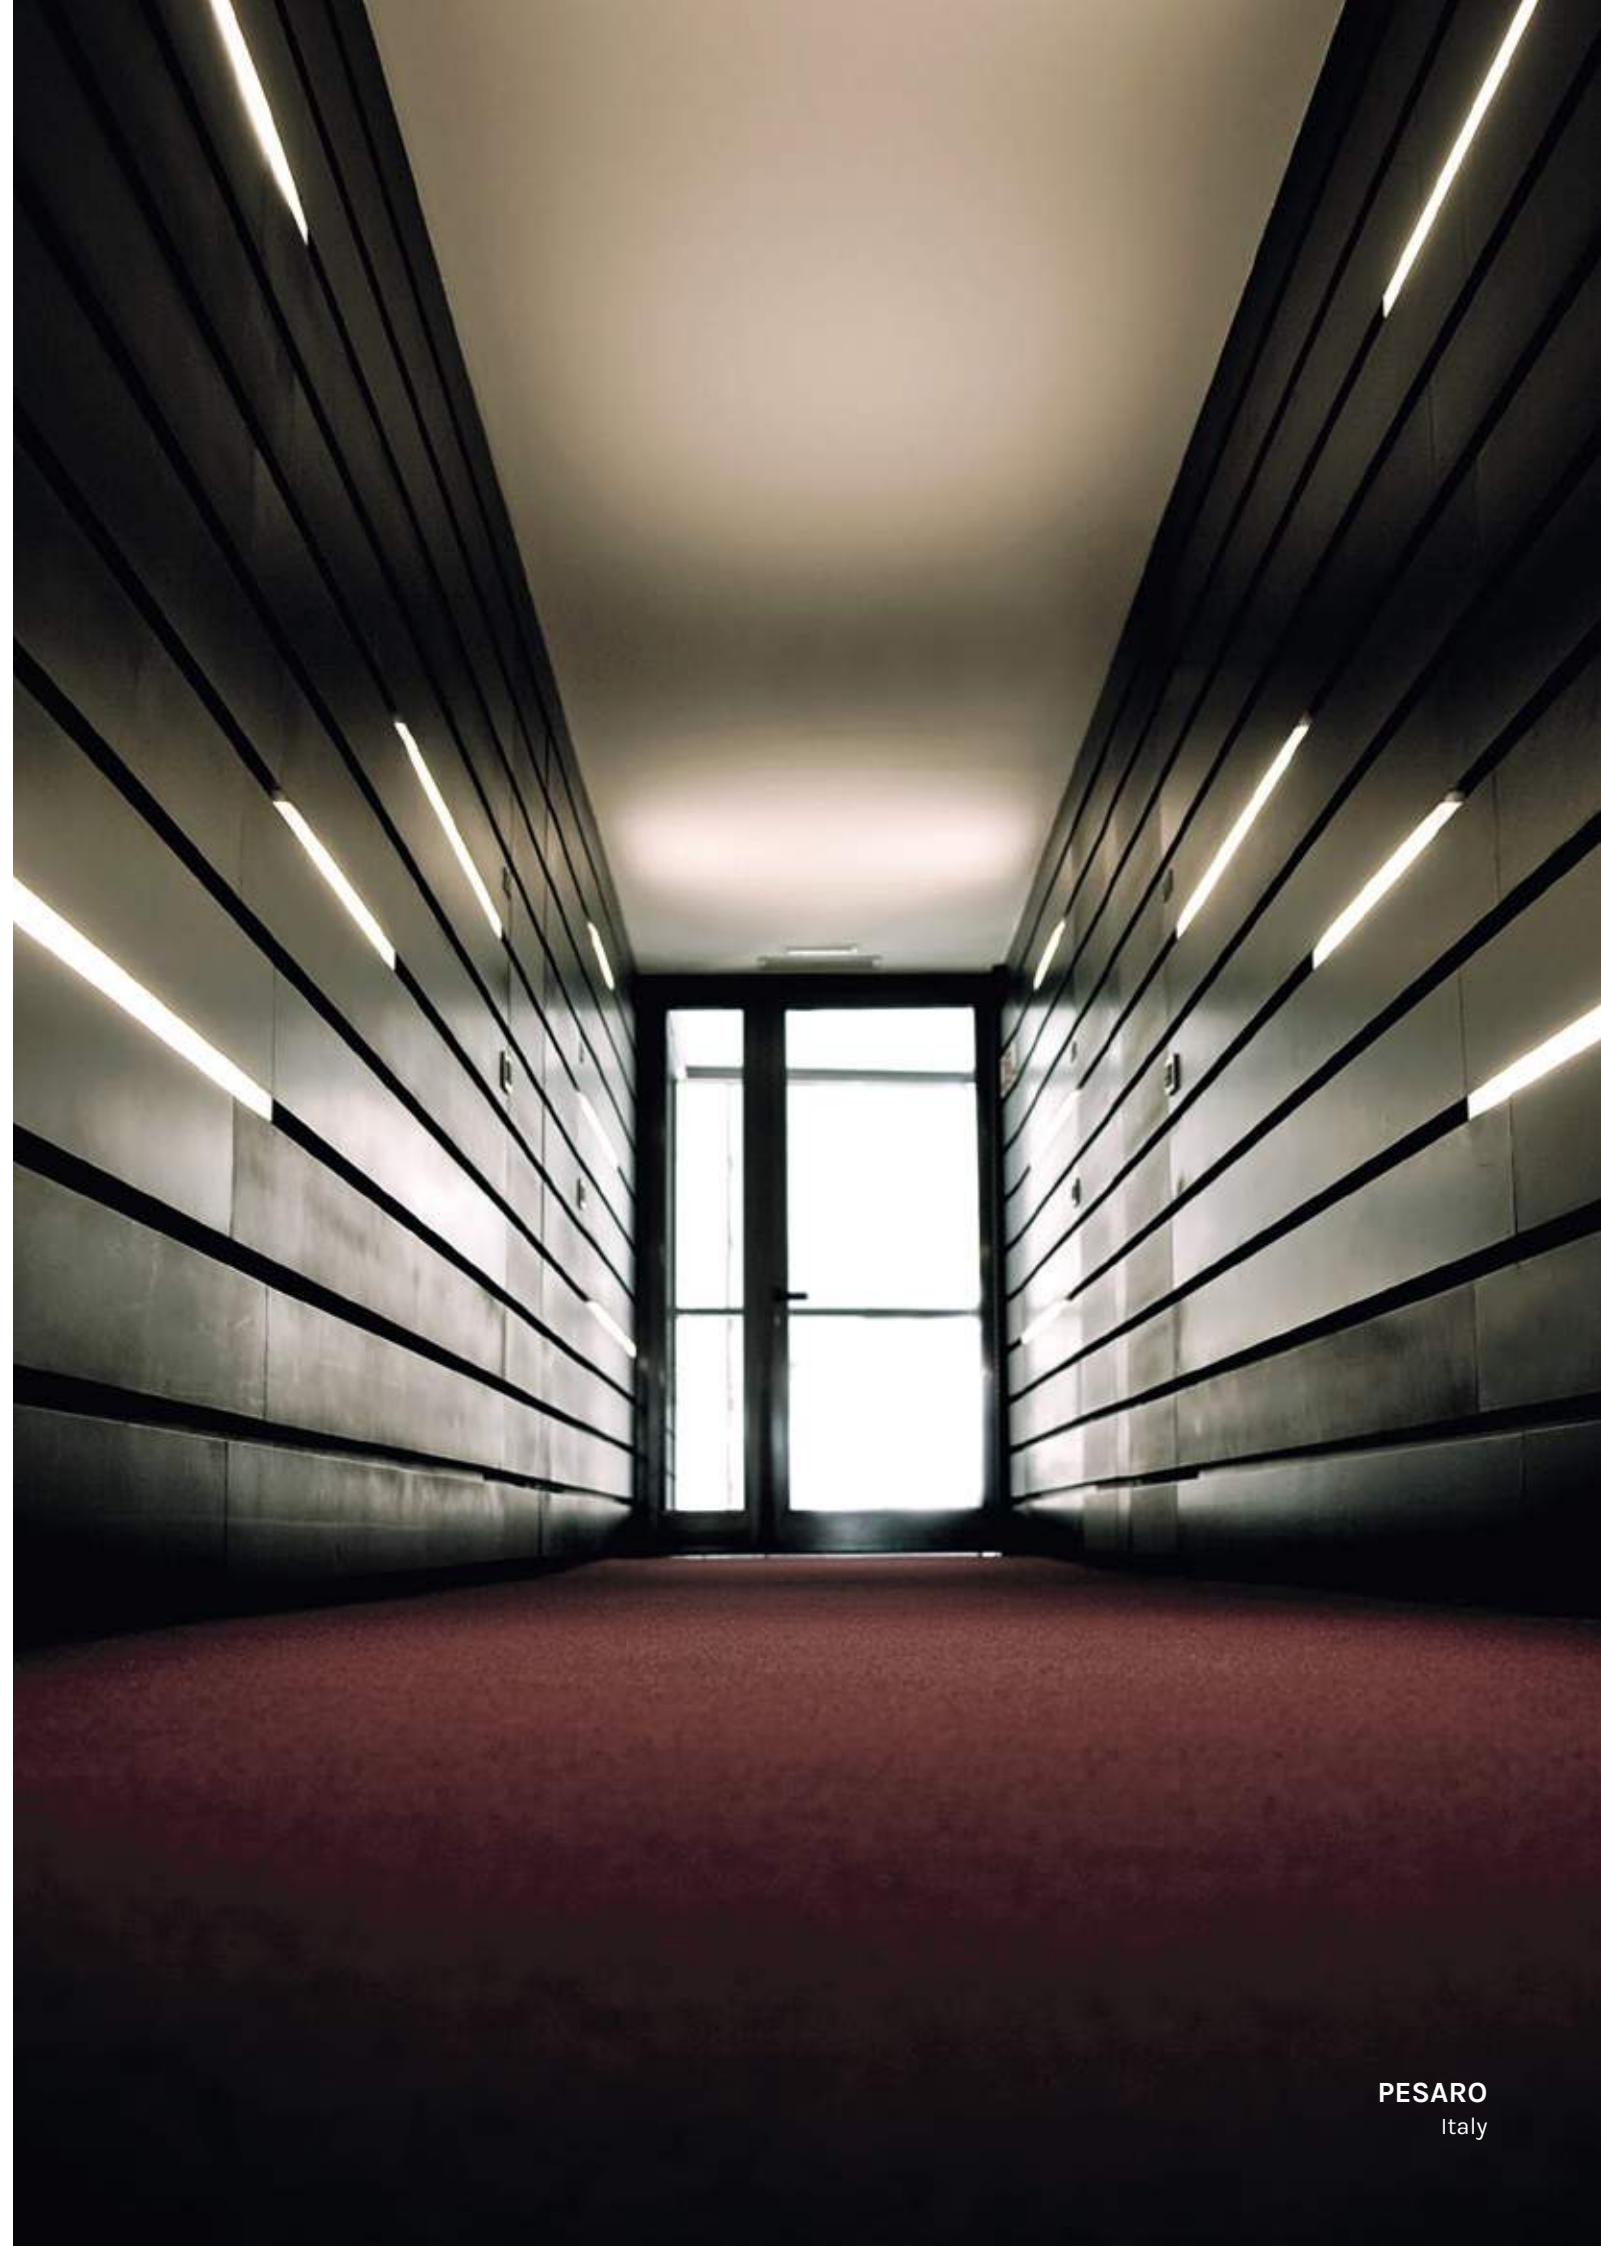

OTTICHE / OPTICS

U-D 80° / 100° Diffused Beam



S 75° / 95° Ultra-Wide Beam





AS $\alpha=13^\circ$ 30° / 75° Asymmetric Beam



Trail

Parete / Wall-mounted

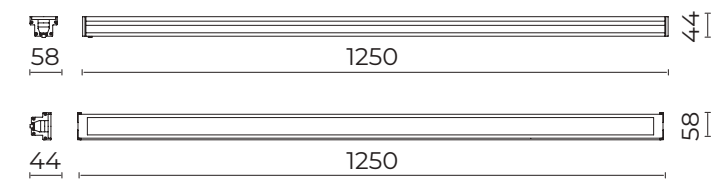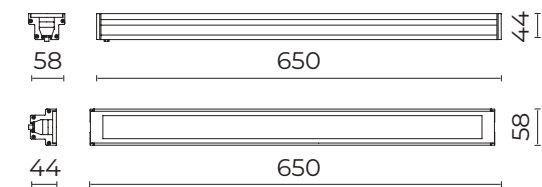


Trail

Parete / Wall-mounted

ACCESSORI / ACCESSORIES

06OT988A0

Box cablato per attacco a parete o a soffitto IP65 CL II
Wired box for wall or ceiling attachment IP65 CL II

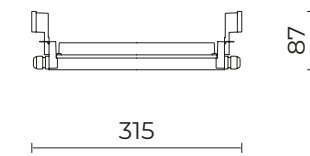


06TR997A0

Staffe fissaggio parete driver remoto
Wall mounting brackets, remote driver




06TA902X0

Driver elettronico 60W 24V IP66
Electronic driver 60W 24V IP66




06LL914AB0

Driver elettronico DALI 150W 24V IP67
DALI electronic driver 150W 24V IP67




06LL915AB0

Driver elettronico 240W 24V IP67
Electronic driver 240W 24V IP67




06GC902X0

B165 - Connettore 2 poli IP68
2-pole connector IP68




06TR977X0

B220 - Connettore 4 vie IP68
4-way connector IP68

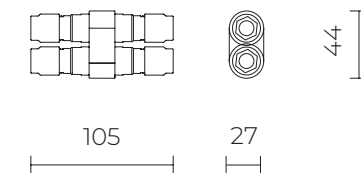


OTTICHE / OPTICS

U-D 80° / 100° Diffused Beam

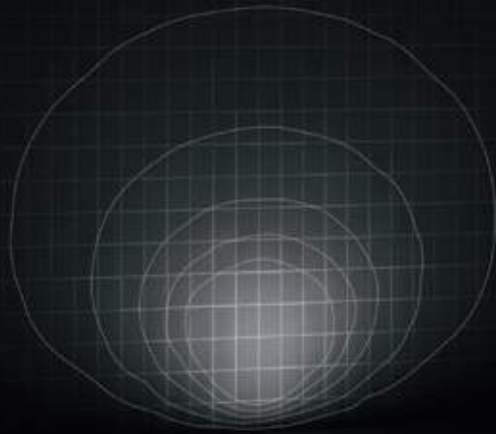

Trail
Solid Line

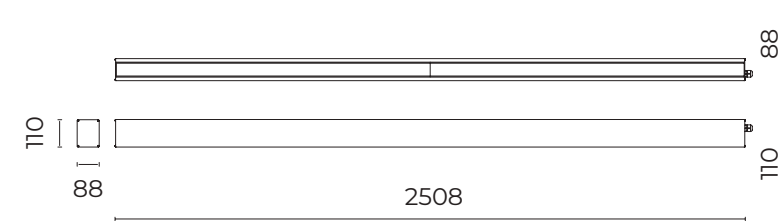

Metalmek Lighting B.V

Canadabaan7-d
5388 RT Nistelrode
Tel. 0412-614033

info@metalmek.nl
www.metalmek.nl

Metalmek

Cariboni
group

 **LIVAL**

NORDIC  **ALUMINIUM**