



LIGHTING COLLECTION

Metalmek

ARCHITECTURAL



ARCHITECTURAL



VECTOR A LENS

INSTALLAZIONE

Sospensione, plafone, incasso

APPLICAZIONI

Area commerciale, locale pubblico, locale residenziale, ufficio, negozio, grandi aree commerciali

CORPO

In estruso di alluminio, verniciato con polveri epossipoliestere SOLVENT FREE termoindurenti a 180°C, con pretrattamento superficiale di fosfatazione.

COLORI FINITURE

Bianco, Nero

MOUNTINGS

Suspended fitting, Surface mounted fitting, Built-in fitting

APPLICATION

Commercial area, public hall, residential hall, office, shop, large commercial areas

BODY

In extruded aluminium, painted with SOLVENT-FREE epoxy polyester powders, thermosetting at 180°C, after phosphate treatment.



FINISHING COLOURS

White, Black





VECTOR A 9806 LENS

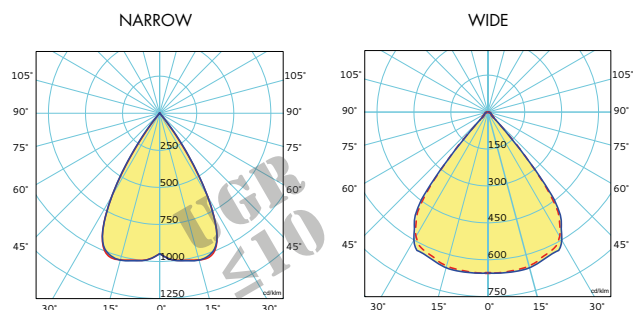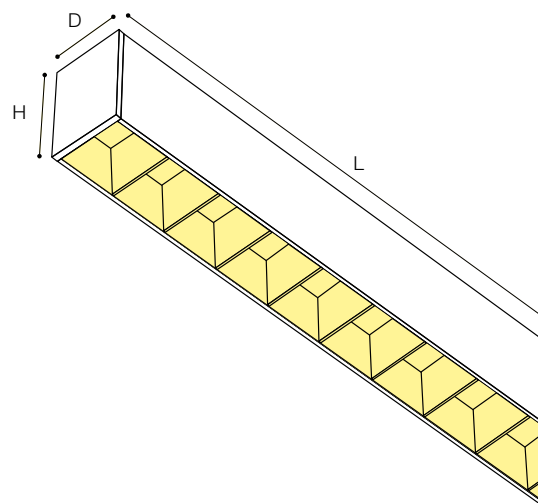

EMISSIONE LUMINOSA

Diretta - Simmetrica

DISPOSITIVO OTTICO

Optica lenticolare Darklight, a celle quadrate in policarbonato di colore nero lucido.
Lente in PMMA trasparente (efficienza 87%)
Narrow 50°
Wide 80°

LIGHT EMISSION

Direct - Symmetric

OPTICAL DEVICE

Darklight lenticular optic, with square cells in glossy black polycarbonate.
Transparent PMMA lens (87% efficiency)
Narrow 50°
Wide 80°



K	mA	lm IN	W	L	H	D
3000 / 4000		1230 / 1300	7	285		
3000 / 4000		2460 / 2600	13	565		
3000 / 4000	350	3690 / 3900	20	845	69	50
3000 / 4000		4920 / 5200	26,8	1125		
		6150 / 6500	33,50	1405		

COMPORRE IL CODICE PRODOTTO IN BASE ALLE VOSTRE ESIGENZE, SEGUENDO L'ORDINE INDICATO
DIAL THE PRODUCT CODE ACCORDING TO YOUR NEEDS, FOLLOWING THE ORDER SHOWN

980631WW0285E0B

ART.	CRI	ALIMENTAZIONE/ FEEDING mA	LENTE / LENS	LAMP. K	L (mm)	CABLAGGIO/WIRING	COLORE/COLOR
9806	: ≥80	3: 350mA	1: 50°	WW: 3000	0285	E0: Elettronico/ Electronic	B: Bianco/white
	9: ≥90	5: 500mA	2: 80°	NW: 4000	...	DD: Dimmerabile DALI/ DALI dimmable	N: Nero/black
					...		
					1405		



ACCESSORI

4417SP1-2


KIT PER SOSPENSIONE costituito da un dispositivo di regolazione micrometrica, x2 cavi d'acciaio Ø 1.2 mm L 2000 mm e un rosone in ottone cromato.

4406

KIT PER ALIMENTAZIONE costituito da un cavo di alimentazione trasparente L 2000 mm e un rosone in plastica. Dotato di morsetti, fermacavo e accessori per il fissaggio.

STIVCA

KIT INSTALLAZIONE SU CONTROSOFFITTI (set 2pz) in cartongesso a raso costituito da coppia di staffe.



ACCESSORIES

4417SP1-2

SUSPENSION KIT consisting of micrometric regulation device, x2 steel cable Ø 1.2 mm L 2000 mm and chromed brass cover.

4406

FEEDING KIT consisting of feeding cable, in transparent colour L 2000 mm and plastic cover. Equipped with connection block, cableglad and fixing accessories.

STIVCA

INSTALLATION KIT ON PLASTERBOARD (2pcs set) false ceilings satin consisting of brackets pair.

SU RICHIESTA

- Alimentatore elettronico dimmerabile
- Alimentatore elettronico dimmerabile DALI
- Ra 90

ON REQUEST

- Dimmable electronic ballast
- DALI dimmable electronic ballast
- Ra 90

FOLLOW US



Metalmek

Metalmek Illuminazione S.r.l.
I - 20045 Lainate (MI)
Via Ramazzotti, 10
Tel. +39 02 9373157
Fax +39 02 9371016
www.metalmek.info
info@metalmek.eu

Metalmek Lighting BV
Canadabaan 7d
NL - 5388 RT Nistelrode
Tel. +31 412 614033
Fax +31 412 613461
www.metalmek.nl
info@metalmek.nl