




TRIGGER MINI CASA

TRIGGER MINI CASA

Input Power	LED-Module *Citizen 6-Gen	Color Consistency	Installation Type	Material	Warranty	Beam Angles	Luminaire Color
110 – 130V	CRI 80+ 3000K, 4000K, 5000K	2-Step MacAdam	Nordic Aluminium 3- phase Tracks	Powder Painted Die-Cast Aluminum head	50 000h	1206 COB: S 15°	White (RAL 9016)
220 – 240V	CRI 90+ 2700K B.BBL, 3000K B.BBL, 3500K B.BBL, 4000K					NFL 21° FL 32° WFL 46°	Silver (Ca. RAL 9006) Black (RAL 9005)

Output Current /
Module Wattage /
System Wattage:

	LED Module: Citizen CLU038-1206 6Gen – COB luminous flux:					Power 300mA – 750mA	
	CRI 80+ 3 000K	CRI 80+ 4 000K	CRI 80+ 5 000K	CRI 90+ 2 700K Below BBL	CRI 90+ 3 000K Below BBL	CRI 90+ 3 500K Below BBL	CRI 90+ 4 000K
350mA / 10W / 11W	1 925Lm	1 925Lm	2 000Lm	1 500Lm	1 550Lm	1 575Lm	1 675Lm
500mA / 17W / 19W	2 675Lm	2 750Lm	2 775Lm	2 075Lm	2 175Lm	2 200Lm	2 325Lm
650mA / 23W / 25W	3 250Lm	3 350Lm	3 375Lm	2 550Lm	2 650Lm	2 700Lm	2 825Lm
750mA / 26W / 29W	3 650Lm	3 750Lm	3 800Lm	2 825Lm	2 925Lm	2 975Lm	3 150Lm

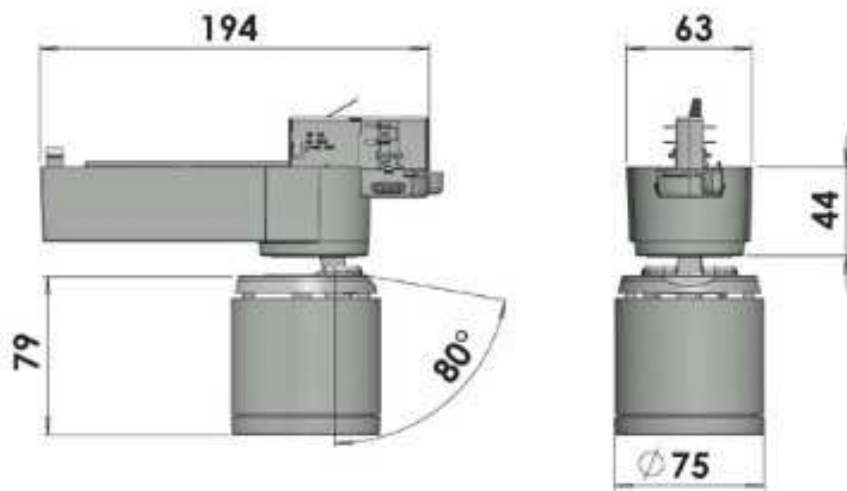

IP20

LED Design | Made In Finland

LIVAL