



FIRST DUO DL


- High efficient downlight with great aesthetic design
 - 1-10V, Push Dim, DALI & BLL compatible

FIRST DUO DL

| Input Power | CRI & CCT Options | Cooling | Installation Type | Material | Warranty | Beam Angles | Luminaire Color |
|-------------|---|-----------------|-------------------------------------|----------------------------------|--------------------|--|-----------------------|
| 110 – 130V | CRI 80+ 3000K, 4000K, 5000K | Passive Cooling | Recessed, Ceiling Mounted Luminaire | Powder Painted Die-Cast Aluminum | 50 000h Or 5 Years | 1206 COB/ 1212 COB: | White (RAL 9016) |
| 220 – 240V | CRI 90+ 2700K B.BBL, 3000K B.BBL, 3500K B.BBL, 4000K | | | | | S 10°/20° NFL 24°/ - FL 30°/40° WFL 50°/60° | Silver (Ca. RAL 9006) |
| | | | | | | | Black (RAL 9005) |

| Output Current / Module Wattage / Luminaire Wattage: | LED Module: Citizen CLU038-1206 | | | | | | |
|--|---------------------------------|-------------------|-------------------|--------------------------------|--------------------------------|--------------------------------|-------------------|
| | CRI 80+ 3 000K | CRI 80+ 4 000K | CRI 80+ 5 000K | CRI 90+ 2 700K Below BBL | CRI 90+ 3 000K Below BBL | CRI 90+ 3 500K Below BBL | CRI 90+ 4 000K |
| 2x 500mA / 18W / 20W | 2x 2 725Lm | 2x 2 800Lm | 2x 2 850Lm | 2x 2 050Lm | 2x 2 125Lm | 2x 2 175Lm | 2x 2 325Lm |
| 2x 900mA / 33W / 35W | 2x 4 425Lm | 2x 4 550Lm | 2x 4 625Lm | 2x 3 325Lm | 2x 3 475Lm | 2x 3 550Lm | 2x 3 750Lm |
| 2x 1050mA / 39W / 43W | 2x 4 975Lm | 2x 5 125Lm | 2x 5 200Lm | 2x 3 725Lm | 2x 3 900Lm | 2x 3 975Lm | 2x 4 225Lm |

| Output Current / Module Wattage / Luminaire Wattage: | LED Module: Citizen CLU048-1212 | | | | | | |
|--|---------------------------------|-------------------|-------------------|--------------------------------|--------------------------------|--------------------------------|-------------------|
| | CRI 80+ 3 000K | CRI 80+ 4 000K | CRI 80+ 5 000K | CRI 90+ 2 700K Below BBL | CRI 90+ 3 000K Below BBL | CRI 90+ 3 500K Below BBL | CRI 90+ 4 000K |
| 2x 700mA / 24W / 28W | 2x 3 900Lm | 2x 4 025Lm | 2x 4 100Lm | 2x 2 950Lm | 2x 3 075Lm | 2x 3 125Lm | 2x 3 325Lm |
| 2x 1050mA / 36W / 41W | 2x 5 575Lm | 2x 5 750Lm | 2x 5 825Lm | 2x 4 200Lm | 2x 4 375Lm | 2x 4 450Lm | 2x 4 750Lm |
| 2x 1400mA / 50W / 55W | 2x 7 000Lm | 2x 7 200Lm | 2x 7 300Lm | 2x 5 250Lm | 2x 5 500Lm | 2x 5 600Lm | 2x 5 950Lm |

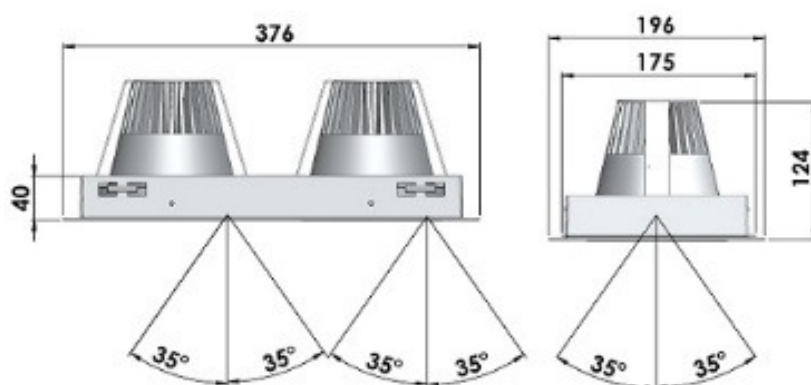

IP20

LED Design | Made In Finland



Metalmek Lighting B.V

Canadabaan7-d
5388 RT Nistelrode
Tel. 0412-614033
Fax 0412-613461

info@metalmek.nl
www.metalmek.nl

